


WINDING RTD'S

1. THERE ARE QTY-9 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 3 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING THE RTD'S.
2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

P HASE	A	B	C
RTD NO.	1, 11, 111	2, 22, 222	3, 33, 333

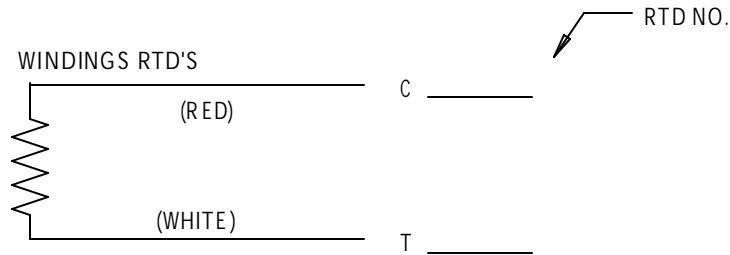

ACCESSORY LISTING
QTY-9 2 LEAD RTD'S

REVISION DESCRIPTION FOR: MOD	REVISION DATE 11-AUG-03	SCALE NONE	UNITS IN	TITLE CUSTOMER CONNECTION DIAGRAM		
NEW	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)			ISSUED BY R. KING	APPROVED BY T. FLINCHUM	
MATERIAL ---	INCHES mm ANGLES			CODE CDG	DWG NO. 0916746	REV -
						SHEET NUMBER 1 OF 1
						DWG SIZE A