




Motor Wiring Diagram

Two - Speed, One Winding, Single Voltage
Constant Horsepower

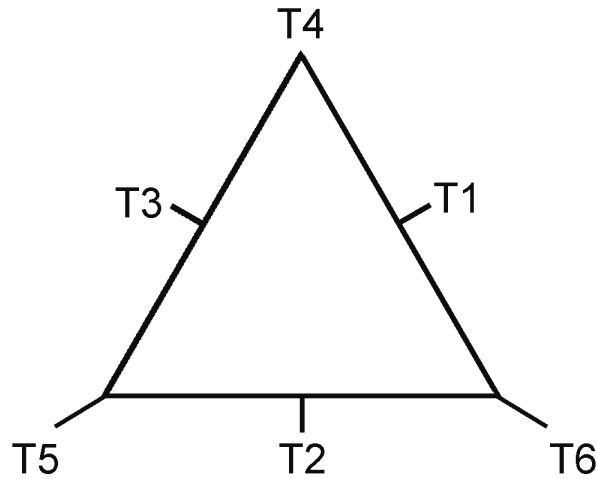

Connection Diagram

Speed	L1	L2	L3	
Low	T1	T2	T3	T4 T5 T6 TOGETHER
High	T6	T4	T5	T1 T2 T3 OPEN

Usage - Two speed single winding. Constant torque horsepower motor.
Each lead may consist of one or more cables having the same lead number.

D003233

To reverse direction of rotation, interchange leads L1 & L2.

Each lead may have one or more cables comprising that lead. In such case, each cable will be marked with the appropriate lead number.