


PROTECTOR TO BE POSITIONED AND SECURED PER S.E.I.M. 4-2

FIRST 1/2 MAIN 1

AUX.

SECOND HALF MAIN 1

VIEWING LEAD END

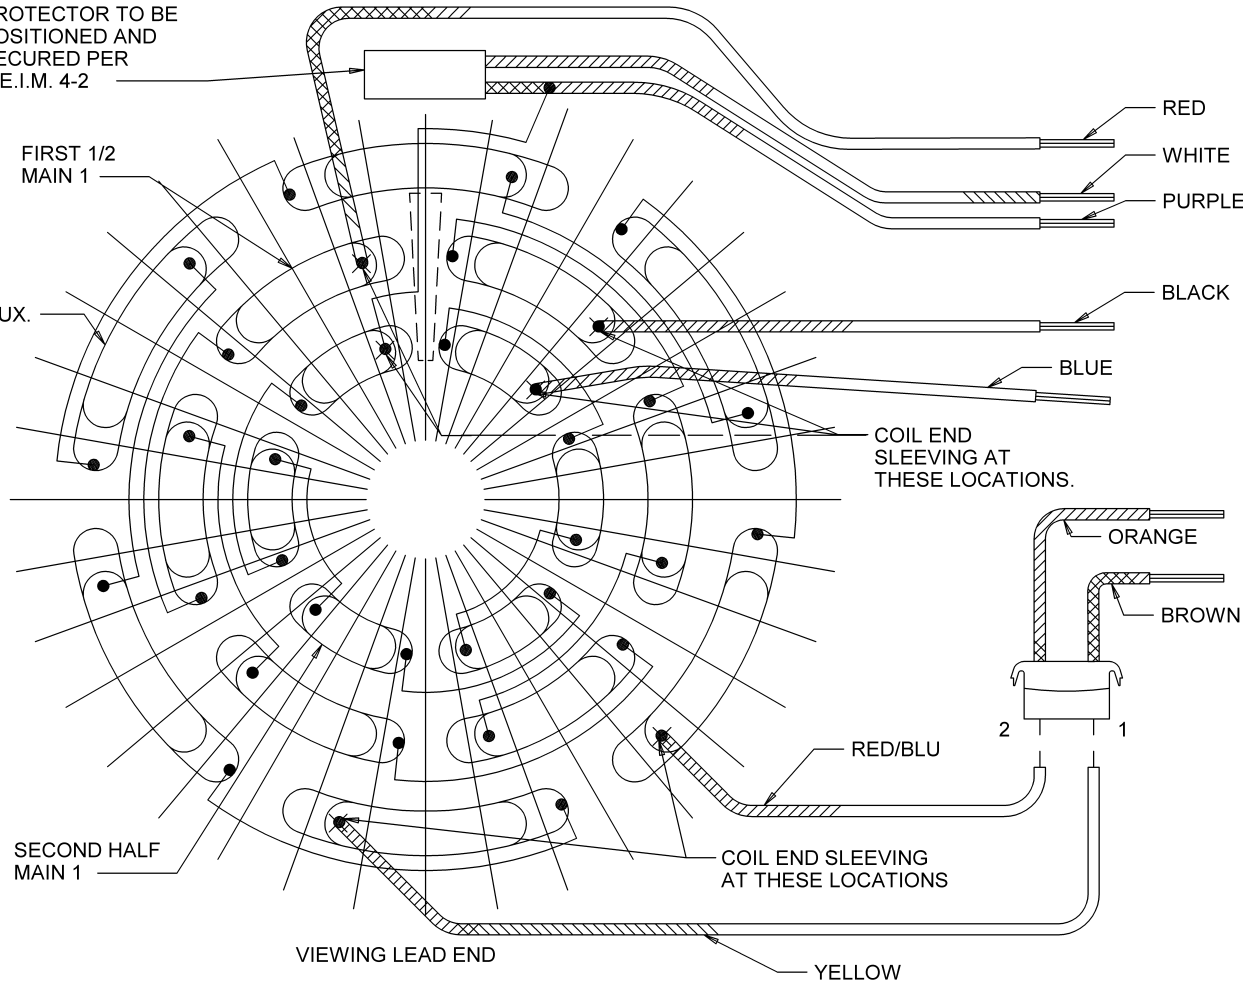

ROTATION IS C.C.W. VIEWING LEAD END TO REVERSE ROTATION INTERCHANGE YELLOW AND RED/BLU LEADS.


230 VOLTS

WHITE — L1
 PURPLE — INSUL.
 RED — INSUL.
 ORANGE — L2
 BLUE — L2
 BLACK — L2

460 VOLTS

WHITE — L1
 PURPLE — INSUL.
 RED — INSUL.
 ORANGE — INSUL.
 BLUE — L2
 BLACK — L2

NOTE:
 MAIN COILS IMMEDIATELY ADJACENT TO EITHER SIDE OF DOTTED AREA ARE TO BE SEPARATED BY A MINIMUM OF .094 ON BOTH ENDS OF STATOR.

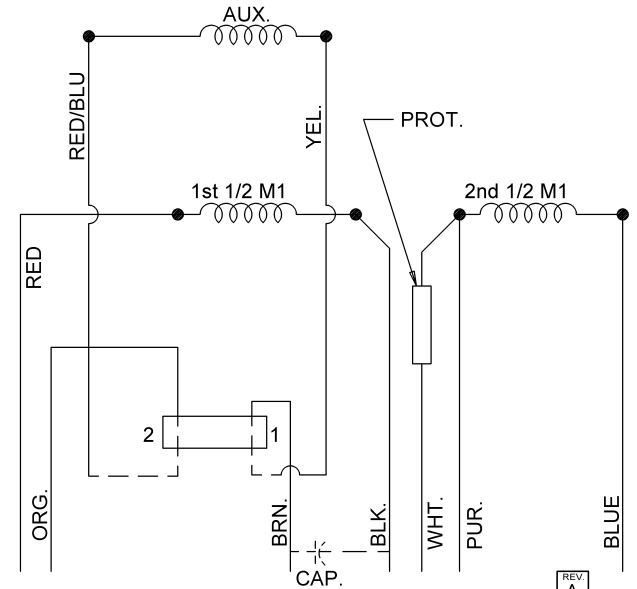

REFER TO SEIM 24-1

REVISION DESCRIPTION FOR: C8396-01		SCALE: NONE	UNITS: INCHES	TITLE: DIAGRAM OF CONNECTIONS		NIDEC MOTOR CORPORATION	
UPDATED BACKGROUND TO NIDEC		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		ISSUED BY: A. SANCHEZ		APPROVED BY: J.I. SALAZAR	
MATERIAL:		INCHES: XX = ± .01 .XXX = ± .005		mm: mm		REVISION DATE: 20-SEP-13	
NIDEC CONFIDENTIAL NIDEC MOTOR CORPORATION 20-Sep-13		MUST BE COMPLIANT TO ROHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		CODE: D04		DWG NO.: 243748	
		ANGLES: X° = ±1°		REV: A		SHEET NUMBER: 1 OF 1 DWG SIZE: B	