


| D04 CONN POINT | CONNECTION COMBINATION |
|----------------------|---------------------------|
| 01 | FN-1 |
| 02 | FN-2 |
| 03 | FN-3 |
| 04 | ST-1 |
| 05 | ST-2 |
| 06 | ST-3 |

| INPUT VOLTAGE | L1 | L2 | L3 | JOIN |
|---------------|-----|-----|-----|------|
| LOW | (1) | (2) | (3) | ... |

NOTE:
1.) INPUT POWER (PHASED A,B,C) CONNECTED AS STATED PRODUCES CWLE ROTATION. TO REVERSE DIRECTION, INTERCHANGE L2& L3.

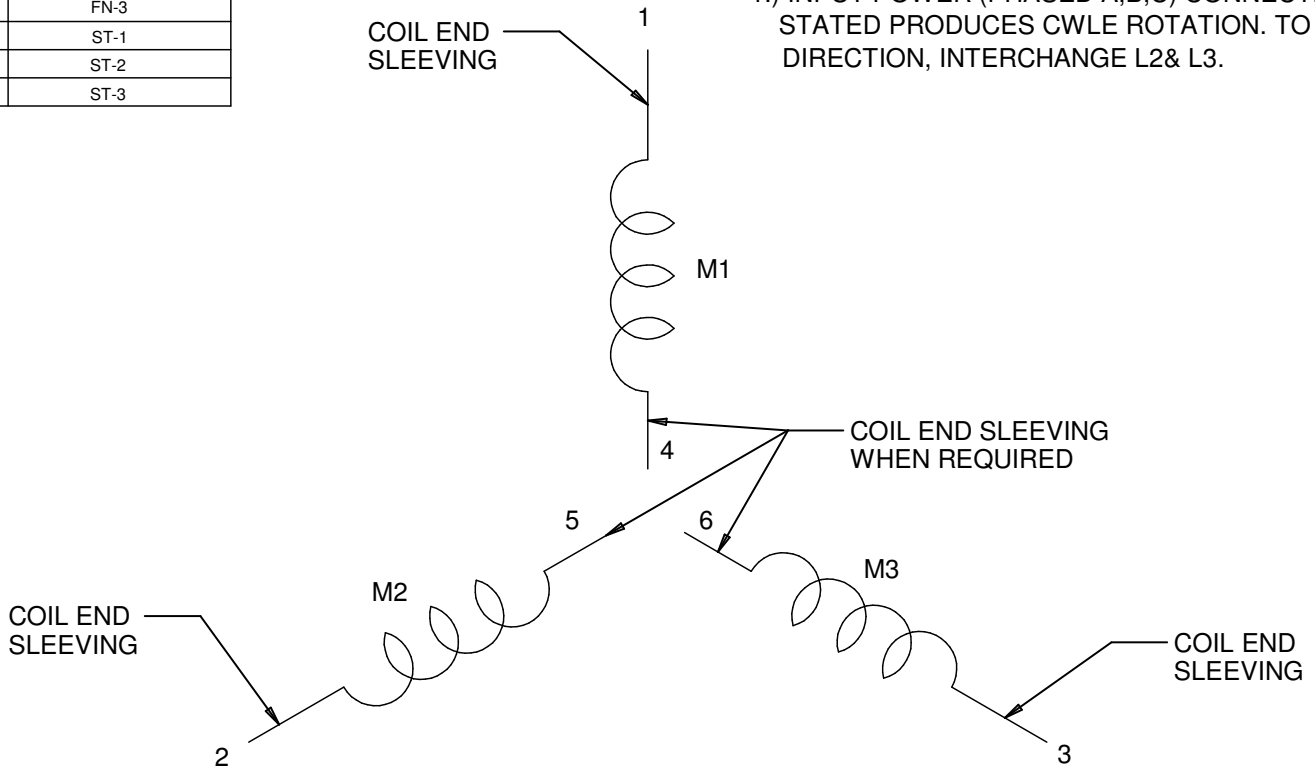

| | | | | | |
|--|---|-----------------|-------------------------------------|-----------------------|--------------------------------|
| REVISION DESCRIPTION FOR: C8396-02 | SCALE NONE | UNITS IN | TITLE DIAGRAM OF CONNECTIONS | | NIDEC MOTOR CORPORATION |
| CHANGED MARK FROM EMERSON TO NIDEC. | TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED) | | ISSUED BY E. VICENCIO | | |
| MATERIAL: | <u>INCHES</u> | <u>mm</u> | REVISION DATE 23-SEP-13 | | |
| MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/EC AND REGULATION EC 1907/2006 (REACH) AS AMENDED | ±.015 | | CODE D04 | DWG NO. 295265 | REV B |
| | ANGLES X°= ±1° | | | | SHEET NUMBER 1 OF 1 |
| | | | | | DWG SIZE A |

NIDEC CONFIDENTIAL
NIDEC MOTOR CORPORATION 21-Sep-13
NMCA (MAR-2011)

SOLIDEDGE