



CONNECTIONS

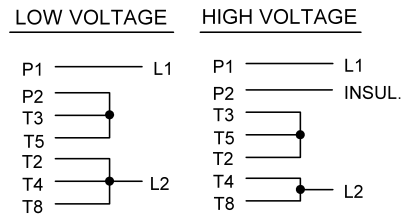

ROTATION:
CCW SWITCH END REVERSIBLE
TO REVERSE ROTATION INTERCHANGE
T5 AND T8 LEADS

NOTES:
- SECURE ALL LEADS TO PREVENT INTERFERENCE WITH MOVING PARTS.
- STATOR LEADS TO BE CONNECTED TO TERMINAL BOARD PER ORIENTATION SHOWN TO ENSURE LEADS ARE KEPT FROM BORE.

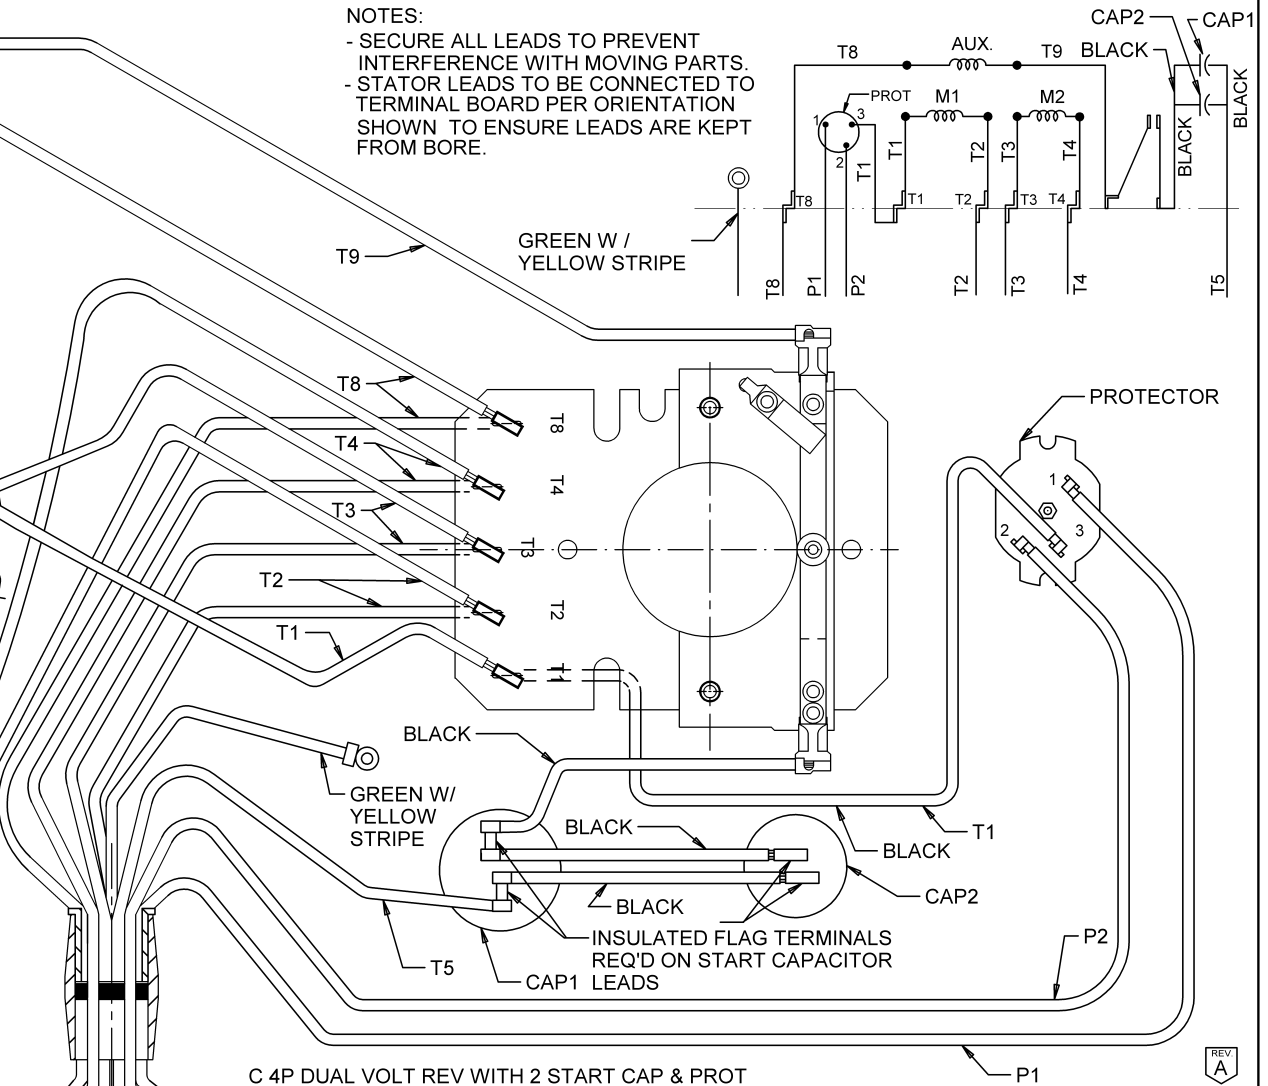

C 4P DUAL VOLT REV WITH 2 START CAP & PROT

NIDEC CONFIDENTIAL
NIDEC MOTOR CORPORATION 21-Sep-13

REVISION DESCRIPTION FOR: C8396-13	SCALE: NONE	UNITS: IN	TITLE: DIAGRAM OF CONNECTIONS	NIDEC MOTOR CORPORATION
CHANGED MARK FROM EMERSON TO NIDEC	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)			
MATERIAL:	INCHES	mm	ISSUED BY: E. VICENCIO	APPROVED BY: J.I. SALAZAR
	ANGLES X° = ±1°		REVISION DATE: 21-SEP-13	
	CODE: D04	DWG NO. 769473	REV NUMBER: A	SHEET NUMBER: 1 OF 1
MUST BE COMPLIANT TO ROHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED			DWG SIZE: B	SOLIDEDGE