


1. THERE ARE QTY-6 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN:

PHASE	A	B	C
RTD NO.	1, 11	2, 22	3, 33

WINDING RTD'S (A, B & C)

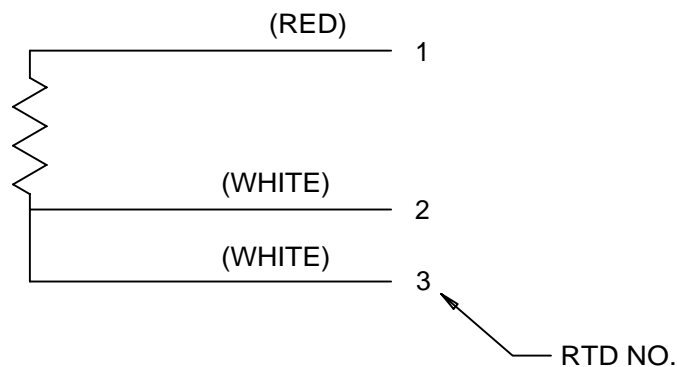

ACCESSORY LISTING
QTY-6 3-LEAD RTD'S SURGE PROTECTOR

REVISION DESCRIPTION FOR: 20111843		SCALE	NONE	UNITS	IN	TITLE		CUSTOMER CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION	
NEW		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)				ISSUED BY		APPROVED BY		REVISION DATE	
MATERIAL:		INCHES		mm		R. KING		T. FLINCHUM		17-MAY-12	
---		ANGLES $X^\circ = \pm 1^\circ$				CODE	DWG NO.		REV	SHEET NUMBER	DWG SIZE
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED						2013927		-	1 OF 1	A	