


1. THERE ARE QTY-2 BEARING RTD'S INSTALLED, ONE PER BEARING. RTD RATING IS ON NAMEPLATE ATTACHED TO MOTOR ADJACENT TO ACCESSORY OUTLET BOX.

A - LOWER BEARING (VERTICAL MOTORS) OR DRIVE END (HORIZONTAL MOTORS).

B - UPPER BEARING (VERTICAL MOTORS) OR OPPOSITE DRIVE END (HORIZONTAL MOTORS).

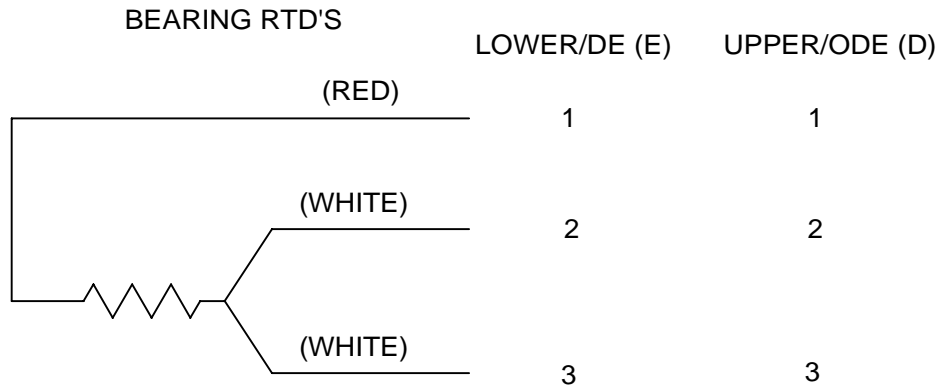

ACCESSORY LISTING
QTY-2 3-LEAD BRG. RTD'S SURGE PROTECTOR

REVISION DESCRIPTION FOR: 20111843		SCALE	NONE	UNITS	IN	TITLE		CUSTOMER CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION	
NEW		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)				ISSUED BY		APPROVED BY		REVISION DATE	
MATERIAL:		INCHES		mm		R. KING		T. FLINCHUM		17-MAY-12	
---		ANGLES $X^\circ = \pm 1^\circ$				CODE	DWG NO.		REV	SHEET NUMBER	DWG SIZE
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED						2013928		-	1 OF 1	A	