


BEARING RTD'S

1. THERE ARE QTY-1 OR 2 (3 LEAD) BEARING RTD'S INSTALLED,
ONE PER BEARING.

A = UPPER/ODE (OPPOSITE DRIVE END)
B = LOWER/DE (DRIVE END)

BEARING RTD'S

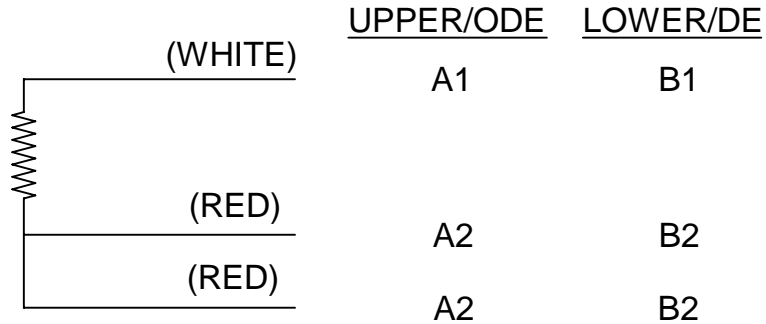

ACCESSORY LISTING
QTY 1 OR 2 BEARING RTD'S (3 LEAD) PYROMATION RTD (TB58)

REVISION DESCRIPTION FOR: 20112037		SCALE	NONE	UNITS	IN	TITLE CUSTOMER CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION		
NEW		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)								
MATERIAL:			INCHES		mm	ISSUED BY R. KING		APPROVED BY K. VOSS		
---		MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED			ANGLES X°= ±1°		REVISION DATE 18-MAY-12	REV -	SHEET NUMBER 1 OF 1	DWG SIZE A
						CODE	DWG NO. 2013969			