

ALT. A 338312 A


BEARING RTD'S

1. THERE ARE QTY-1 OR 2 (3 LEAD) BEARING RTD'S INSTALLED, ONE PER BEARING.

A = UPPER/ODE (OPPOSITE DRIVE END)
 B = LOWER/DE (DRIVE END)

BEARING RTD'S

UPPER/ODE LOWER/DE

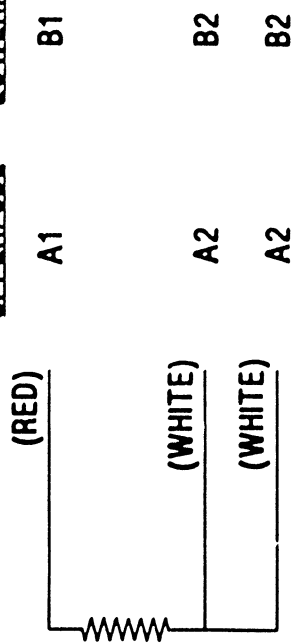

ACCESSORY LISTING	
QTY 1 OR 2 BEARING RTD'S (3 LEAD)	
U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	CUSTOMER CONNECTION DIAGRAM
SCALE NONE 1 IN	FRAME ---
MATERIAL ---	TYPE ---
DATE 12-APR-00, RAW	DATE ---
REVISED 11-JUL-00, RAW	REVISED ---
APPROVED 11-JUL-00, REP	APPROVED ---
SHEET 1 1 9	CDG A 338312 A