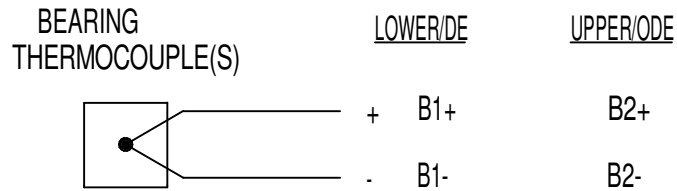


BEARING THERMOCOUPLE





1. THERE ARE QTY. 1 OR 2 BEARING THERMOCOUPLES INSTALLED, (1) PER BEARING.

B1 = LOWER/DE BEARING (DRIVE END)

B2 = UPPER/ODE BEARING (OPPOSITE DRIVE END)



**THERMOCOUPLE
LEAD COLORS**

| | |
|-------------------------|---|
| E CHROMEL-CONSTANTAN |  |
| J IRON-CONSTANTAN |  |
| K CHROMEL-ALUMEL |  |
| T COPPER-CONSTANTAN |  |

ACCESSORY LISTING

QTY - 1 OR 2 BEARING THERMOCOUPLES

| | | | | | | | | | | |
|--|--|--|------|----------------|----|--|----------------|------------------------------------|---------------|----------|
| REVISION DESCRIPTION FOR: MISC | | SCALE | NONE | UNITS | IN | CUSTOMER CONNECTION DIAGRAM | | NIDEC MOTOR CORPORATION | | |
| STL0811 - UPDATED DRAWING FORMAT. | | TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED) | | | | | | | | |
| MATERIAL: | | <u>INCHES</u> | | <u>mm</u> | | ISSUED BY | R. KING | APPROVED BY | E. VEREEN | |
| --- | | | | | | REVISION DATE | 22-AUG-11 | | | |
| MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED | | | | ANGLES X°= ±1° | | CODE | DWG NO. | REV | SHEET NUMBER | DWG SIZE |
| | | | | | | CDG | 0338313 | A | 1 OF 1 | A |