


BEARING THERMOCOUPLE


1. THERE ARE QTY. 1 OR 2 BEARING THERMOCOUPLES INSTALLED, (1) PER BEARING.

B1 = LOWER/DE BEARING (DRIVE END)

B2 = UPPER/ODE BEARING (OPPOSITE DRIVE END)

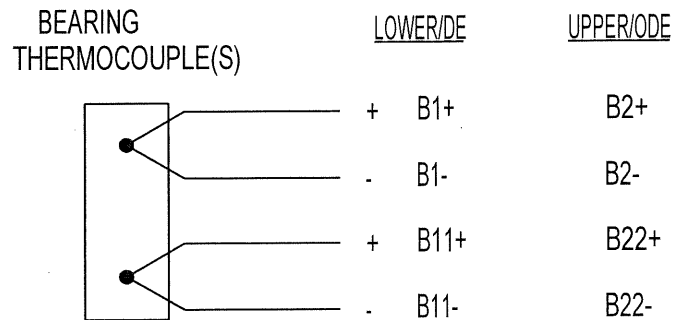

**THERMOCOUPLE
LEAD COLORS**

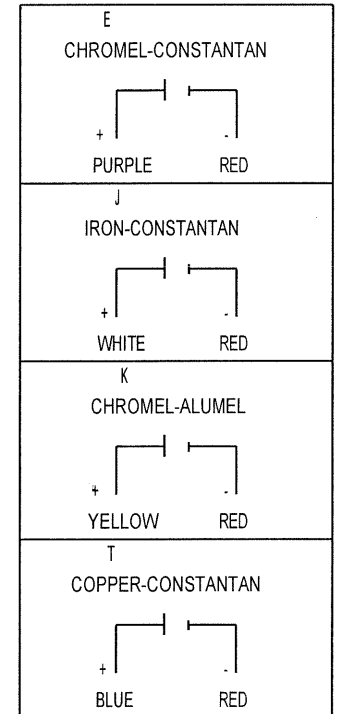

ACCESSORY LISTING
QTY - 1 OR 2 BEARING THERMOCOUPLES

REVISION DESCRIPTION FOR: 20131112 ADDED B11 AND B22 CONNECTION DATA.		SCALE NONE	UNITS IN	CUSTOMER CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION		
MATERIAL: ---		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	INCHES					mm
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		ANGLES X° = ±1°		ISSUED BY R. KING	APPROVED BY T. FLINCHUM	REVISION DATE 18-SEP-13		
				CODE	DWG NO. 0338313	REV B	SHEET NUMBER 1 OF 1	DWG SIZE A