



THERMISTORS

1. THIS MOTOR CONTAINS QTY-6 POSITIVE TEMPERATURE COEFFICIENT (PTC) THERMISTORS (2 SETS OF QTY. 3, 1 PER PHASE PER SET) EMBEDDED IN THE MOTOR WINDING AND INTERNALLY CONNECTED IN SERIES.
2. THE THERMISTOR LEADS ARE MARKED TM1 AND TM2 FOR ALARM/PRIMARY, AND TM3 AND TM4 FOR SHUTDOWN/SECONDARY.

THERMISTORS

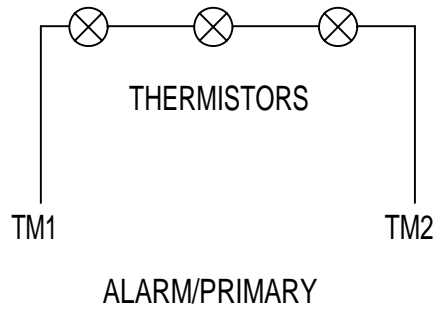

ALARM/PRIMARY

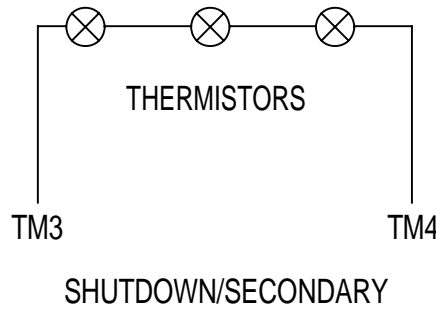

SHUTDOWN/SECONDARY

ACCESSORY LISTING	
QTY (3) THERMISTORS (ALARM/PRIMARY)	
QTY (3) THERMISTORS (SHUTDOWN/SECONDARY)	

REVISION DESCRIPTION FOR: MISC		SCALE	NONE	UNITS	IN	<b>DRAWING, CONNECTION DIAGRAM</b>		<b>NIDEC MOTOR CORPORATION</b>			
STL0211 - UPDATED FORMAT.		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)									
MATERIAL:		INCHES		mm		ISSUED BY	R. KING	APPROVED BY	C. CADE	REVISION DATE	24-FEB-11
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		ANGLES		X°= ±1°		CODE	DWG NO.		0415259	REV	B
										SHEET NUMBER	1 OF 1
										DWG SIZE	A