



THERMISTORS

1. THIS MOTOR CONTAINS QTY-6 POSITIVE TEMPERATURE COEFFICIENT (PTC) THERMISTORS (2 SETS OF QTY. 3, 1 PER PHASE PER SET) EMBEDDED IN THE MOTOR WINDING AND INTERNALLY CONNECTED IN SERIES.
2. THE THERMISTOR LEADS ARE MARKED TM1 AND TM2 FOR ALARM/PRIMARY, AND TM3 AND TM4 FOR SHUTDOWN/SECONDARY.

THERMISTORS

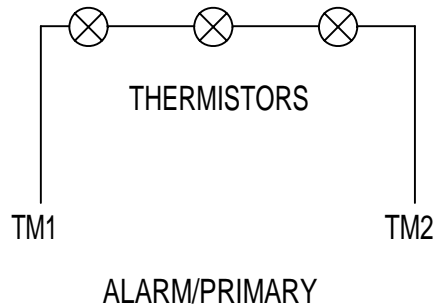

ALARM/PRIMARY

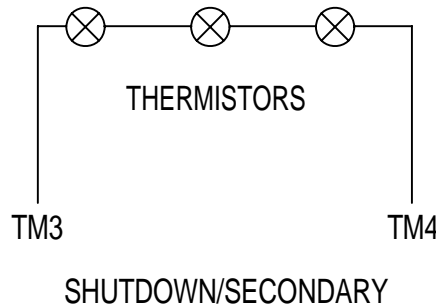

SHUTDOWN/SECONDARY

ACCESSORY LISTING
QTY (3) THERMISTORS (ALARM/PRIMARY)
QTY (3) THERMISTORS (SHUTDOWN/SECONDARY)

REVISION DESCRIPTION FOR: MISC	SCALE NONE	UNITS IN	DRAWING, CONNECTION DIAGRAM	NIDEC MOTOR CORPORATION	
STL0211 - UPDATED FORMAT.	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)				
MATERIAL:	INCHES	mm	ISSUED BY R. KING	APPROVED BY C. CADE	REVISION DATE 24-FEB-11
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED	ANGLES X°= ±1°		CODE	DWG NO. 0415259	REV B
					SHEET NUMBER 1 OF 1
					DWG SIZE A