


WINDING RTD'S

1. THERE ARE QTY-9 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 3 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.
2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

| PHASE   | A          | B          | C          |
|---------|------------|------------|------------|
| RTD NO. | 1, 11, 111 | 2, 22, 222 | 3, 33, 333 |

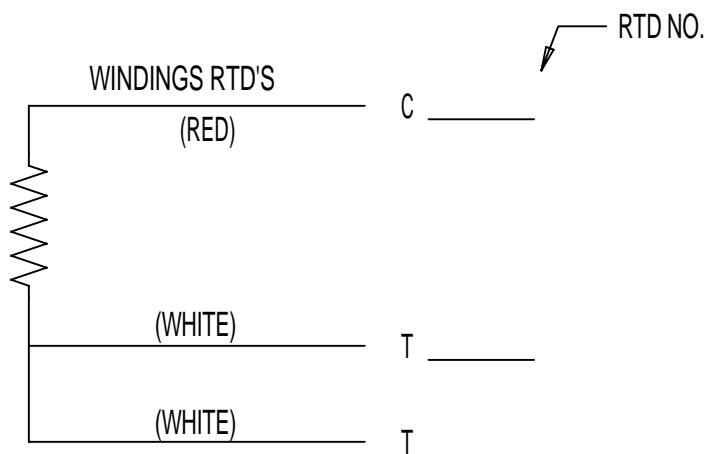

|                    |
|--------------------|
| ACCESSORY LISTING  |
| QTY-9 3 LEAD RTD'S |

|   |   |          |                                   |                 |                         |
|---|---|----------|-----------------------------------|-----------------|-------------------------|
| REVISION DESCRIPTION FOR: MISC  | SCALE NONE  | UNITS IN | TITLE CUSTOMER CONNECTION DIAGRAM |                 | NIDEC MOTOR CORPORATION |
| STL0211 - UPDATED FORMAT.   | TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED) |          | ISSUED BY R. KING                 |                 |                         |
| MATERIAL: ---   | INCHES  | mm       | REVISION DATE 23-FEB-11           |                 | REV B                   |
| MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED | ANGLES X°= ±1°  |          | CODE                              | DWG NO. 0426979 | SHEET NUMBER 1 OF 1     |
|   |   |          |                                   |                 | DWG SIZE A              |