


1. THERE ARE QTY-6 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDINGS (1 PER PHASE PER WINDING.) REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD *HIGH SPEED	1H	2H	3H
RTD *LOW SPEED	1L	2L	3L

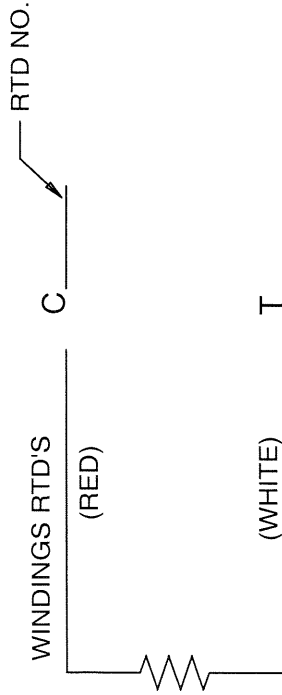

ACCESSORY LISTING

QTY-6 2 LEAD RTD'S

REVISION DESCRIPTION FOR: MOD	REVISION DATE	SCALE	UNITS
NEW	22-AUG-05	NONE	IN
TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)			
INCHES		mm	ANGLES
MATERIAL			

ISSUED BY R. KING		APPROVED BY T. FLINCHUM	
CODE CDG	DWG NO. 0463458	REV -	
TITLE DRAWING, CONNECTION DIAGRAM		SHEET NUMBER 1 OF 1	DWG SIZE A

