


THERMISTORS

1. THIS MOTOR CONTAINS QTY-6 POSITIVE TEMPERATURE COEFFICIENT (PTC) THERMISTORS (2 SETS OF QTY. 3, 1 PER PHASE PER SET) EMBEDDED IN THE MOTOR WINDING.
2. THE THERMISTOR LEADS ARE MARKED TM1, TM2 AND TM3 FOR ALARM/PRIMARY, AND TM11, TM22 AND TM33 FOR SHUTDOWN/SECONDARY.

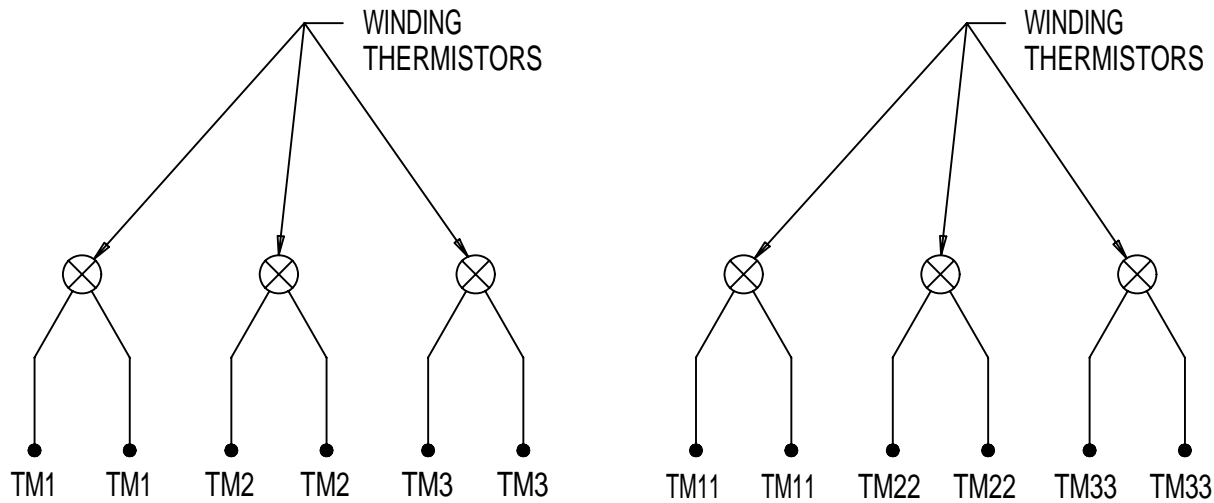

ACCESSORY LISTING
QTY (3) THERMISTORS (ALARM/PRIMARY)
QTY (3) THERMISTORS (SHUTDOWN/SECONDARY)

REVISION DESCRIPTION FOR: MISC	SCALE	NONE	UNITS	IN	TITLE	<b>DRAWING, CONNECTION DIAGRAM</b>	<b>NIDEC MOTOR CORPORATION</b>		
STL0211 - UPDATED FORMAT.	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)								
MATERIAL:	INCHES	mm			ISSUED BY	APPROVED BY	REVISION DATE		
					R. KING	C. CADE	24-FEB-11		
	ANGLES X°= ±1°		CODE	DWG NO.	<b>0488397</b>		REV	SHEET NUMBER	DWG SIZE
							<b>B</b>	1 OF 1	<b>A</b>