


THERMISTORS

1. THIS MOTOR CONTAINS QTY-6 POSITIVE TEMPERATURE COEFFICIENT (PTC) THERMISTORS (2 SETS OF QTY. 3, 1 PER PHASE PER SET) EMBEDDED IN THE MOTOR WINDING.
2. THE THERMISTOR LEADS ARE MARKED TM1, TM2 AND TM3 FOR ALARM/PRIMARY, AND TM11, TM22 AND TM33 FOR SHUTDOWN/SECONDARY.

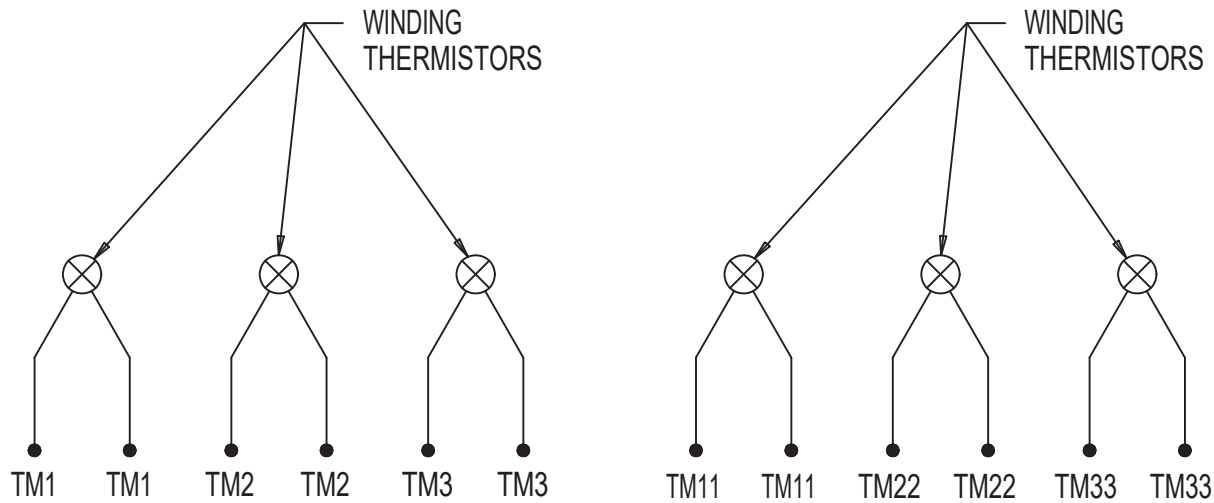

ACCESSORY LISTING
QTY (3) THERMISTORS (ALARM/PRIMARY)
QTY (3) THERMISTORS (SHUTDOWN/SECONDARY)

REVISION DESCRIPTION FOR: MISC	SCALE	NONE	UNITS	IN	TITLE	DRAWING, CONNECTION DIAGRAM	NIDEC MOTOR CORPORATION
STL0211 - UPDATED FORMAT.	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)						
MATERIAL:	INCHES	mm			ISSUED BY	APPROVED BY	REVISION DATE
					R. KING	C. CADE	24-FEB-11
	ANGLES X° = ±1°		CODE	DWG NO.	0488397		REV
							B
							SHEET NUMBER
							1 OF 1
							DWG SIZE
							A