


DUAL ELEMENT BEARING RTD'S


1. THERE ARE QTY-1 OR 2 (6 LEAD) DUAL ELEMENT BEARING RTD'S INSTALLED, ONE PER BEARING.

A = UPPER/ODE (OPPOSITE DRIVE END)
B = LOWER/DE (DRIVE END)

BEARING RTD ELEMENT 1

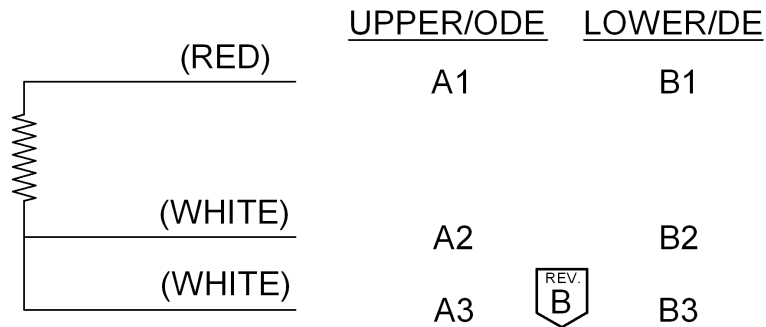

BEARING RTD ELEMENT 2

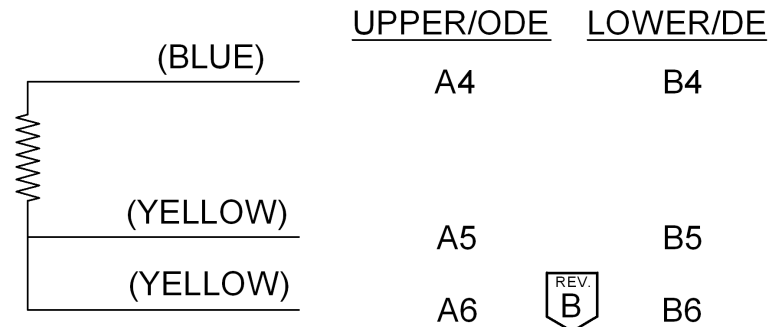

ACCESSORY LISTING

QTY 1 OR 2 DUAL ELEMENT BEARING RTD'S (6 LEAD)

REVISION DESCRIPTION FOR: 20110284		SCALE	NONE	UNITS	IN	TITLE CUSTOMER CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION		
CHGD. UPPER & LOWER BRG. RTD DESIGNATIONS.		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)								
MATERIAL:		<u>INCHES</u>		<u>mm</u>		ISSUED BY R. KING		APPROVED BY J. O'BRIEN		
---		MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/EC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		ANGLES X°= ±1°		CODE		DWG NO. 0494738		
						REVISION DATE 29-SEP-11		REV B	SHEET NUMBER 1 OF 1	DWG SIZE A