


WINDING RTD'S

1. THERE ARE QTY-3 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 1 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD No.	1	2	3

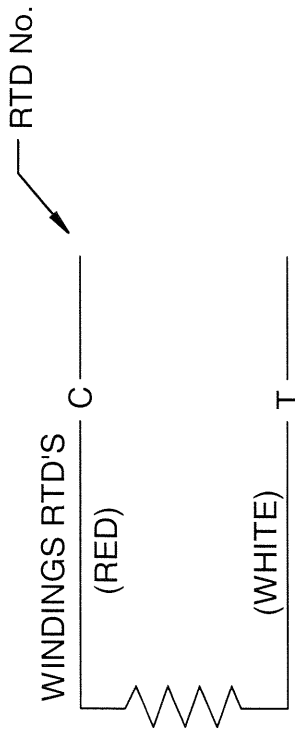

ACCESSORY LISTING
 QTY-3 2 LEADS RTD'S

REVISION DESCRIPTION FOR: 20075960 MOD. CREATED ON JUNE-28-2007		REVISION DATE 28-JUN-07	SCALE NONE	UNITS IN	TITLE CUSTOMER, CONNECTION DIAGRAM		
MATERIAL: MUST BE COMPLIANT TO RIGHTS DIRECTIVE EU 2002/95/EC - - - -		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		ISSUED BY J. AYALA		REV --	
		INCHES	[mm]		APPROVED BY F. LARA		DWG NO. 0626183
				CODE CDG		DWG NO.	