


BEARING RTD'S

1. THERE ARE QTY. 1 OR 2 (4 LEAD) BEARING RTD'S INSTALLED,
(1) PER BEARING.

A = UPPER/ODE (OPPOSITE DRIVE END)
B = LOWER/DE (DRIVE END)

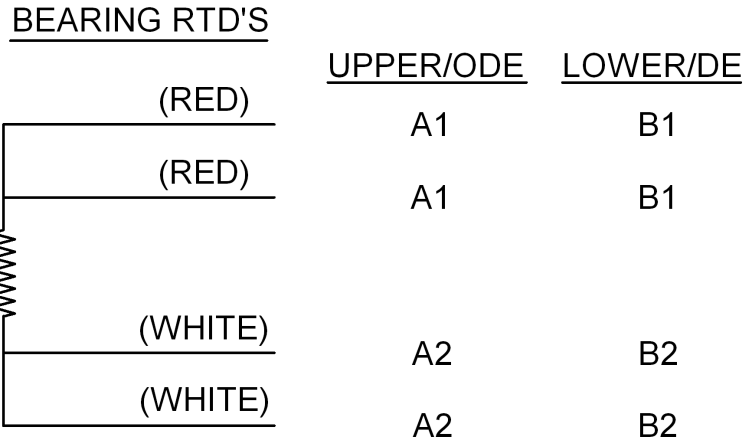

ACCESSORY LISTING
QTY-1 OR 2 BEARING RTD'S (4 LEAD)

ENG. REF.
SAI 628563

REVISION DESCRIPTION FOR: 20078299	SCALE	UNITS
MOD, FORMAT UPDATED	NONE	
	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	
	<u>INCHES</u>	<u>mm</u>
MATERIAL:	ANGLES X°= ±1°	
-		

TITLE	
CUSTOMER CONNECTION DIAGRAM	
ISSUED BY	APPROVED BY
K. FRIEDMAN	C. CADE
CODE	DWG NO.
	0628562

NIDEC MOTOR CORPORATION		
REVISION DATE		
30-SEP-11		
REV	SHEET NUMBER	DWG SIZE
A	1 OF 1	A