


THERMOSTATS

1. MOTOR IS EQUIPPED WITH QTY-3 (1 PER PHASE) NORMALLY CLOSED THERMOSTATS PER WINDING. THERMOSTATS ARE SET TO OPEN AT HIGH TEMPERATURE.
2. THERMOSTATS MUST NOT BE USED TO SWITCH VOLTAGES EXCEEDING 18 VDC OR 240 VAC.

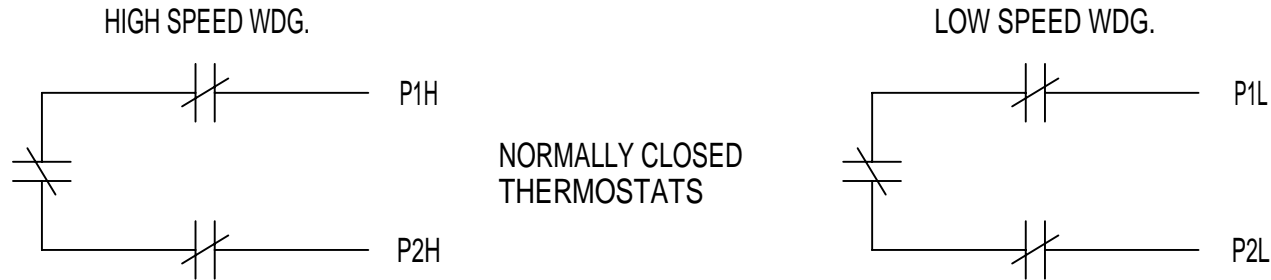

ACCESSORY LISTING
QTY-3 N.C. THERMOSTATS (HIGH SPEED) QTY-3 N.C. THERMOSTATS (LOW SPEED)

REVISION DESCRIPTION FOR: MISC		SCALE	UNITS	TITLE		NIDEC MOTOR CORPORATION
STL0211 - UPDATED FORMAT.		NONE	IN	CUSTOMER CONNECTION DIAGRAM		
MATERIAL:		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		ISSUED BY	APPROVED BY	REVISION DATE
---		<u>INCHES</u>	<u>mm</u>	R. KING	C. CADE	23-FEB-11
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		ANGLES X°= ±1°		CODE	DWG NO.	REV
					0787005	C
						SHEET NUMBER
						1 OF 1
						DWG SIZE
						A