


THERMOSTATS

1. MOTOR IS EQUIPPED WITH QTY-3 (1 PER PHASE) NORMALLY CLOSED THERMOSTATS PER WINDING. THERMOSTATS ARE SET TO OPEN AT HIGH TEMPERATURE.
2. THERMOSTATS MUST NOT BE USED TO SWITCH VOLTAGES EXCEEDING 18 VDC OR 240 VAC.

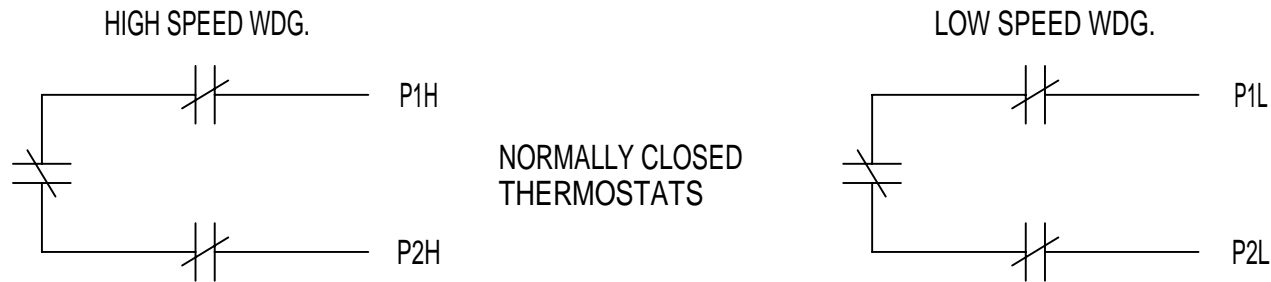

ACCESSORY LISTING
QTY-3 N.C. THERMOSTATS (HIGH SPEED) QTY-3 N.C. THERMOSTATS (LOW SPEED)

REVISION DESCRIPTION FOR: MISC STL0211 - UPDATED FORMAT.	SCALE NONE	UNITS IN	CUSTOMER CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION		
	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)						
MATERIAL: ---	<u>INCHES</u>	<u>mm</u>	ISSUED BY R. KING	APPROVED BY C. CADE	REVISION DATE 23-FEB-11		
	ANGLES $X^\circ = \pm 1^\circ$		CODE	DWG NO. 0787005	REV C	SHEET NUMBER 1 OF 1	DWG SIZE A