


Alt: A 833980 A

WINDING RTD'S

1. THERE ARE QTY-6 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 2 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD NO.	1,11	2,22	3,33

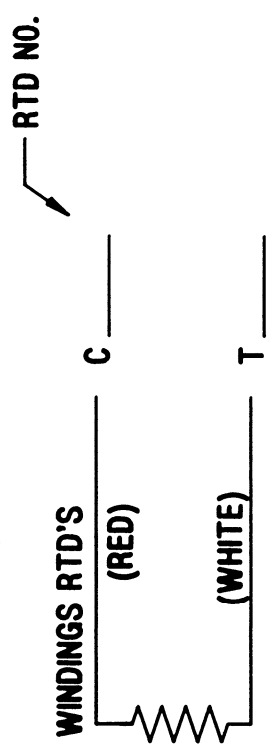

ACCESSORY LISTING

QTY-6 2 LEAD RTD'S

ALT. CHANGE LET NOTICE NO.	DESCRIPTION OF CHANGE	U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	DATE	BY	CDG	ALT.
-	REDRAWN ON CAD 8-10-89	DRWN 9-MAY-79, HEB				A
A	UPDATED	RVSD 5-JUN-00, RWK				A
		APPD 5-JUN-00, REP				A
						A
						A

CUSTOMER CONNECTION DIAGRAM

SCALE NONE 1 IN

MATERIAL

FRAME

TYPE