


Alt Part C 834066 A

THERMOSTATS

1. MOTOR IS EQUIPPED WITH QTY-3 (1 PER PHASE) NORMALLY CLOSED THERMOSTATS. THERMOSTATS ARE SET TO OPEN AT HIGH TEMPERATURE.
2. THERMOSTATS MUST NOT BE USED TO SWITCH ABOVE 18 AMPS AT 24 VDC OR 12 AMPS AT 230 VAC.

N. C. THERMOSTATS

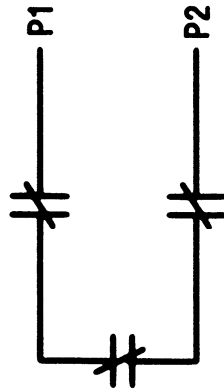

ACCESSORY LISTING
QTY-3 N.C. THERMOSTATS

CHANGE NOTICE NO.	DESCRIPTION OF CHANGE	U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	SCALE	DATE	BY	CDG	ALT PART
A	REDRAWN ON CAD 10/28/91	U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	NONE	11/8	1	CDG	C 834066 A
B	8-NOV-95 UPDATE TEXT	U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	NONE	11/8	1	CDG	C 834066 A
C	6-JUN-00 UPDATED	U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	NONE	11/8	1	CDG	C 834066 A
		U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	NONE	11/8	1	CDG	C 834066 A
		U.S. ELECTRICAL MOTORS DIVISION OF EMERSON ELECTRIC CO. ST. LOUIS, MISSOURI	NONE	11/8	1	CDG	C 834066 A

CUSTOMER CONNECTION DIAGRAM

TITLE	CUSTOMER CONNECTION DIAGRAM
FRAME	---
TYPE	---