ALT.		
B	X853506	A

THERMOSTATS

1. MOTOR IS EQUIPPED WITH QTY-6 (2 PER PHASE) NORMALLY CLOSED THERMOSTATS IN THE MOTOR WINDING. THERMOSTATS ARE SET TO OPEN AT HIGH TEMPERATURE.

2. THERMOSTATS MUST NOT BE USED TO SWITCH VOLTAGES EXCEEDING 18 VDC OR 240 VAC.

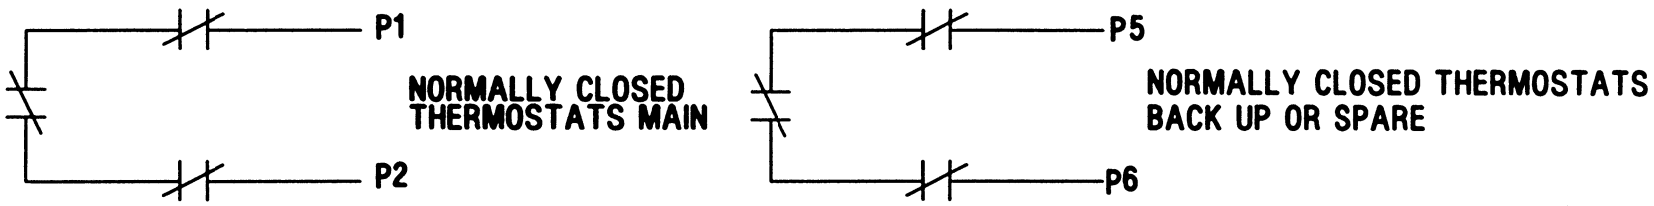

ACCESSORY LISTING
QTY-6 N.C. THERMOSTATS (MAIN & SPARE)

ALT LET	CHANGE NOTICE NO.	DESCRIPTION OF CHANGE
-	MISC	8-JUL-97
A	MOD	10-MAY-00 UPDATED
B	MOD	5-JUN-00 DELETED SP HTRS

U.S. ELECTRICAL MOTORS
DIVISION OF EMERSON ELECTRIC CO.
ST. LOUIS, MISSOURI

TITLE: CUSTOMER CONNECTION DIAGRAM

SCALE	1:1	UNITS	IN
MATERIAL	---		
DRWN	8-JUL-97, TTS		
RVSD	5-JUN-00, RWK		
APPD	5-JUN-00, REP		
PART#	---	FRAME	---
CSTG#	---	TYPE	---
SHEET	1 OF 1	PREFIX	CDG

ALT.		
B	X853506	A