


1. THERE ARE QTY-6 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 2 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD NO.	1,11	2,22	3,33

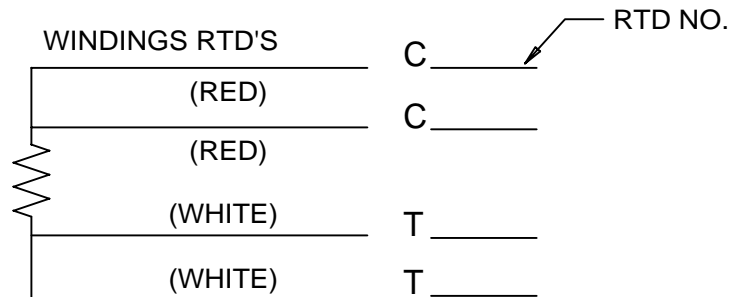

<b>ACCESSORY LISTING</b>
QTY-6 4 LEAD RTD'S

REVISION DESCRIPTION FOR: MISC		SCALE	NONE	UNITS	IN	TITLE <b>DRAWING, CONNECTION DIAGRAM</b>		<b>NIDEC MOTOR CORPORATION</b>			
STL0211 - UPDATED FORMAT.		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)									
MATERIAL:		INCHES		mm		ISSUED BY R. KING	APPROVED BY C. CADE	REVISION DATE 23-FEB-11			
---		ANGLES X°= ±1°			CODE	DWG NO.	0900324		REV B	SHEET NUMBER 1 OF 1	DWG SIZE A