


1. THERE ARE QTY-6 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 2 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD NO.	1,11	2,22	3,33

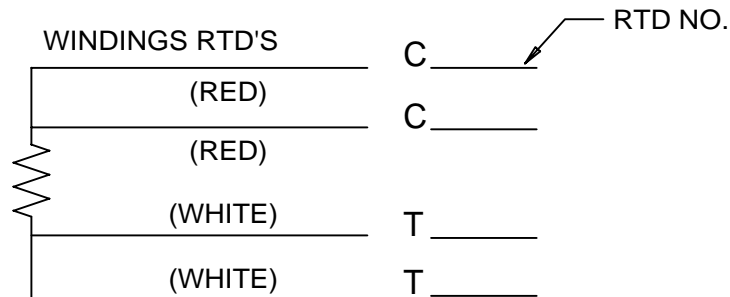

ACCESSORY LISTING
QTY-6 4 LEAD RTD'S

REVISION DESCRIPTION FOR: MISC		SCALE	NONE	UNITS	IN	TITLE DRAWING, CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION				
STL0211 - UPDATED FORMAT.		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)										
MATERIAL:		INCHES		mm		ISSUED BY R. KING		APPROVED BY C. CADE		REVISION DATE 23-FEB-11		
---		---		---		CODE		DWG NO. 0900324		REV B	SHEET NUMBER 1 OF 1	DWG SIZE A
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		ANGLES			$X^\circ = \pm 1^\circ$							