


ALT.
A

1. THERE ARE QTY-6 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDING, 2 PER PHASE. REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.

2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD NO.	1,11	2,22	3,33

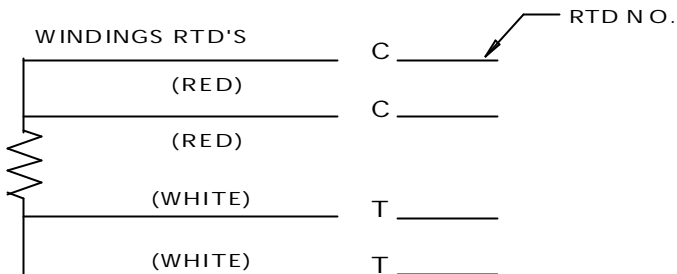

ACCESSORY LISTING
QTY-6 4 LEAD RTD'S

REVISION DESCRIPTION FOR: ECO MOD	REVISION DATE 12-MAY-03	SCALE NONE	UNITS IN	TITLE DRAWING, CONNECTION DIAGRAM				
REVISED NOTE 1.	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)			ISSUED BY R. KING		APPROVED BY T. FLINCHUM		
MATERIAL ---	INCHES mm ANGLES .X = ±.1 .X = ±.75 ±0.5° .XX = ±.03 .XX = ±.38 .XXX = ±.015			CODE CDG	DWG NO. 0900324	REV A	SHEET NUMBER 1 OF 1	DWG SIZE A