


WINDING RTD'S

1. THERE ARE QTY-12 RESISTANCE TYPE TEMPERATURE DETECTORS (RTD) INSTALLED IN THE STATOR WINDINGS, (2 PER PHASE PER WINDING). REFER TO NAMEPLATE ATTACHED TO THE MOTOR ADJACENT TO ACCESSORY OUTLET BOX FOR RATING OF THE RTD'S.
2. DETECTORS ARE INSTALLED IN PHASES AS SHOWN.

PHASE	A	B	C
RTD *HIGH SPEED	1H, 11H	2H, 22H	3H, 33H
RTD *LOW SPEED	1L, 11L	2L, 22L	3L, 33L

WINDING RTD'S

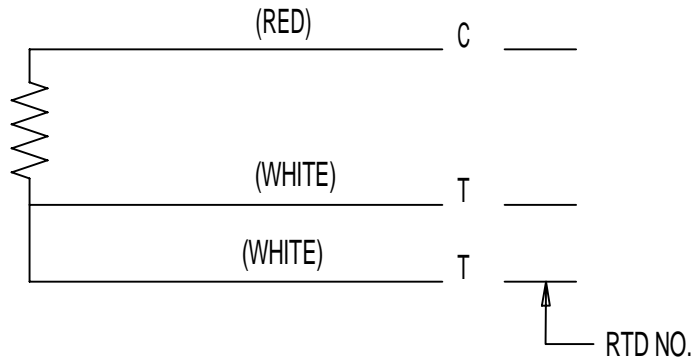

ACCESSORY LISTING
QTY-12 3 LEAD RTD'S

REVISION DESCRIPTION FOR: MISC		SCALE	NONE	UNITS	IN	TITLE		DRAWING, CONNECTION DIAGRAM		NIDEC MOTOR CORPORATION		
STL0211 - UPDATED FORMAT.		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)				ISSUED BY		APPROVED BY		REVISION DATE		
MATERIAL:		INCHES		mm		R. KING		C. CADE		24-FEB-11		
MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/IEC AND REGULATION EC 1907/2006 (REACH) AS AMENDED		ANGLES X°= ±1°				CODE	DWG NO.		REV		SHEET NUMBER	DWG SIZE
							0918987		B		1 OF 1	A