

EFFECTIVE:
11-MAY-11


SUPERSEDES:
18-OCT-00

HORIZONTAL MOTORS

PRINT:
07-2145

SHEET:
1 OF 1

FRAME: 360UC
 BASIC TYPE: JAD, JDE

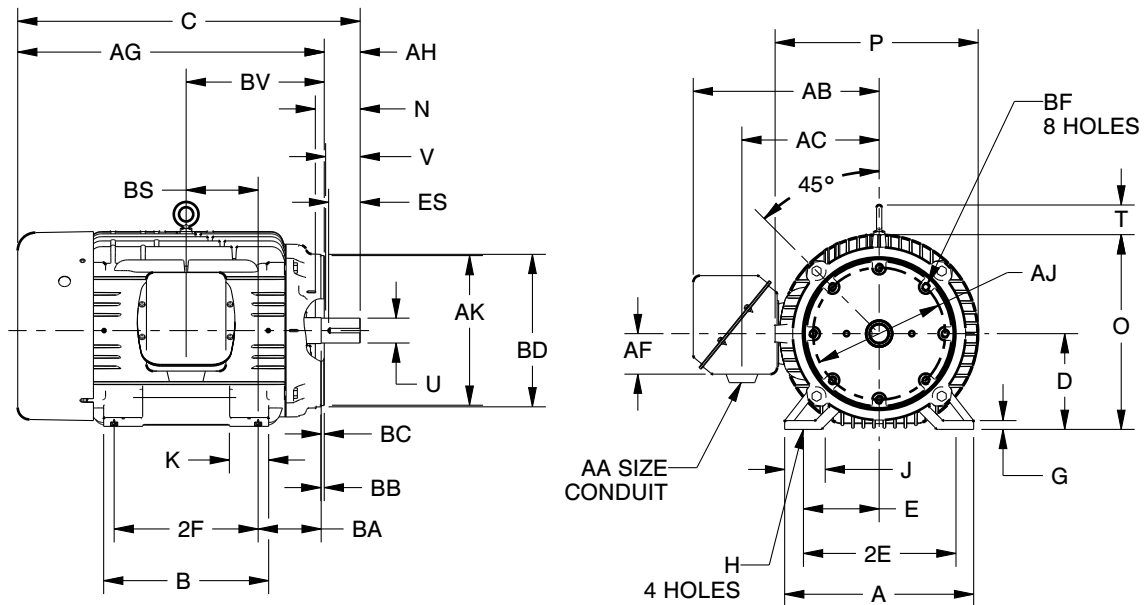

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

	A	B	C	D	E	2E	G	H	J
IN	17.13	14.50	33.06	9.00	7.00	14.00	.81	.66	3.25
MM	435	368	840	229	178	356	21	17	83

	K	N	O	P ²	T	U	V	AA	AB
IN	3.25	6.88	18.13	18.69	2.50	2.125	5.62	2 1/2 NPT	16.38
MM	83	175	461	475	64	53.98	143		416

	AC	AF	AG	AH	AJ	AK	BA	BB	BC
IN	12.19	4.19	26.94	6.13	11.000	12.500	5.88	.28	.25
MM	310	106	684	156	279.40	317.50	149	7	6

	BD	BF ⁴	BS	BV	ES	SQ.			
IN	12.78	5/8 11 X .94	6.13	12.31	4.28	.500			
MM	325		156	313	109	12.70			

	FRAME	2F
		± .03
IN	364UC	11.25
MM		286
IN	365UC	12.25
MM		311

TOLERANCES	IN	MM
FACE RUNOUT	.007 T.I.R.	.18 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.007 T.I.R.	.18 T.I.R.
PERMISSIBLE SHAFT RUNOUT	.003 T.I.R.	.05 T.I.R.

1: ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
 2: LARGEST MOTOR WIDTH
 3: CONDUIT BOX MAY BE LOCATED ON EITHER SIDE OF MOTOR. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.

4: TAP SIZE AND BOLT PENETRATION ALLOWANCE.
 5: ALL TAPPED HOLES ARE UNIFIED NATIONAL COARSE, RIGHT HAND THREAD.
 6: TOLERANCES SHOWN ARE IN INCHES ONLY.

07-2145/B

Nidec Motor Corporation
 St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY
 P. INGALE
 APPROVED BY
 R. KING

IHP_DP_NMCA (MAR-2011) PROENGINEER