

EFFECTIVE:  
21-MAR-11

# HORIZONTAL MOTORS


AUTOMOTIVE DUTY WITH NEMA "C" FACE

PRINT:  
07-2554

SUPERSEDES:  
06-FEB-04

FRAME: 284, 286UC  
BASIC TYPE: JAD, JDE

SHEET:  
1 OF 1

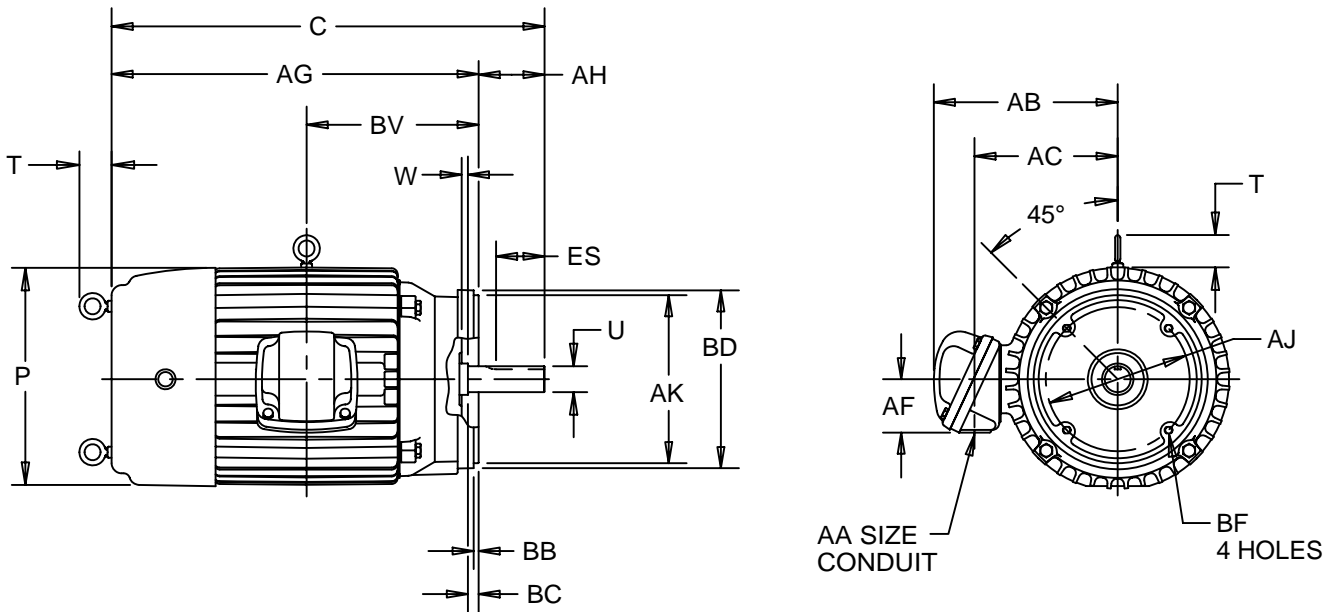

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	C	P <sup>6</sup>	T <sup>7</sup>	U -.001	W	AA	AB	AC	AF	AG	AH
IN	28.44	14.31	2.06	1.625	.25	2 NPT	13.19	9.69	3.25	23.81	4.63
MM	722	363	52	41.28	6		335	246	83	605	118

UNITS	AJ	AK -.003	BB MIN	BC	BD MAX	BF <sup>2</sup>	BV	ES MIN	SQ KEY
IN	9.000	10.500	.25	.25	11.25	1/2-13 X .75	10.50	3.75	.375
MM	228.60	266.70	6	6	286		267	95	9.53

TOLERANCES	
FACE RUNOUT	.004 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET	.004 T.I.R.
PERMISSIBLE SHAFT RUNOUT	.002 T.I.R.

- 1: ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
- 2: TAP SIZE AND BOLT PENETRATION ALLOWANCE.
- 3: ALL TAPPED HOLES ARE UNIFIED NATIONAL COARSE, RIGHT HAND THREAD.
- 4: TOLERANCE SHOWN ARE IN INCHES ONLY.

- 5: CONDUIT BOX MAY BE LOCATED ON EITHER SIDE OF MOTOR. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
- 6: LARGEST MOTOR WIDTH.
- 7: THIS UNIT MAY HAVE HORIZONTAL LIFTING, VERTICAL LIFTING OR BOTH.

07-2554/B

**Nidec Motor Corporation**  
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY  
**R. KING**  
APPROVED BY  
**K. POTTER**

IHP\_DP\_NMCA (MAR-2011) SOLIDEDGE