


EFFECTIVE:
21-APR-14

DIMENSION PRINT
TEFC- HOSTILE DUTY
FRAME: 324T THRU 326TS
BASIC TYPE: CT

PRINT:
07-2727

SUPERSEDES:
01-JUN-11

SHEET:
1 OF 1

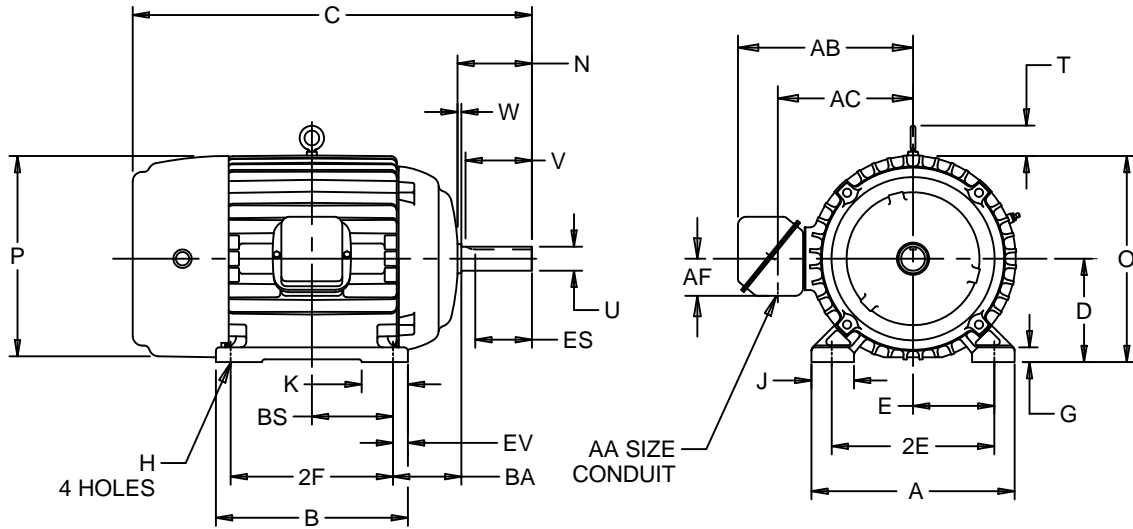

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	A	B	D -.06	E	2E ±.03	G	H +.05	J	K	O	P ²	T
IN	15.75	15.00	8.00	6.25	12.50	1.13	.66	3.25	4.66	16.13	16.22	2.03
MM	400	381	203	159	318	29	17	83	118	410	412	52

UNITS	W	AA	AB	AC	AF	BA	BS	EV	SQ KEY
IN	.38	2.00	14.13	10.75	3.25	5.25	6.00	1.50	.500
MM	10		359	273	83	133	152	38	12.70

FRAME	UNITS	C	N	U -.001	V MIN	ES MIN	FRAME	UNITS	2F ±.03
320T	IN	30.69	5.63	2.125	5.00	3.91	324T,TS	IN	10.50
	MM	780	143	53.98	127	99		MM	267
320TS	IN	29.19	4.13	1.875	3.50	2.03	326T,TS	IN	12.00
	MM	741	105	47.63	89	52		MM	305

- 1: ALL ROUGH DIMENSIONS MAY VARY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
- 2: LARGEST MOTOR WIDTH.
- 3: TOLERANCES SHOWN ARE IN INCHES ONLY.
- 4: STANDARD ASSEMBLY POSITION F-1 IS SHOWN F-2 IS PROVIDED WHEN SPECIFIED. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90° REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN

07-2727/B

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY
R. KING
APPROVED BY
J. O'BRIEN

IHP_DP_NMCA (MAR-2011) SOLIDEDGE