

EFFECTIVE:
16-JUN-11


SUPERSEDES:
13-JULY-09

HORIZONTAL MOTORS UNIMOUNT

FRAME: 254, 256T
BASIC TYPE: UTN

PRINT:
07-2880

SHEET:
1 OF 1

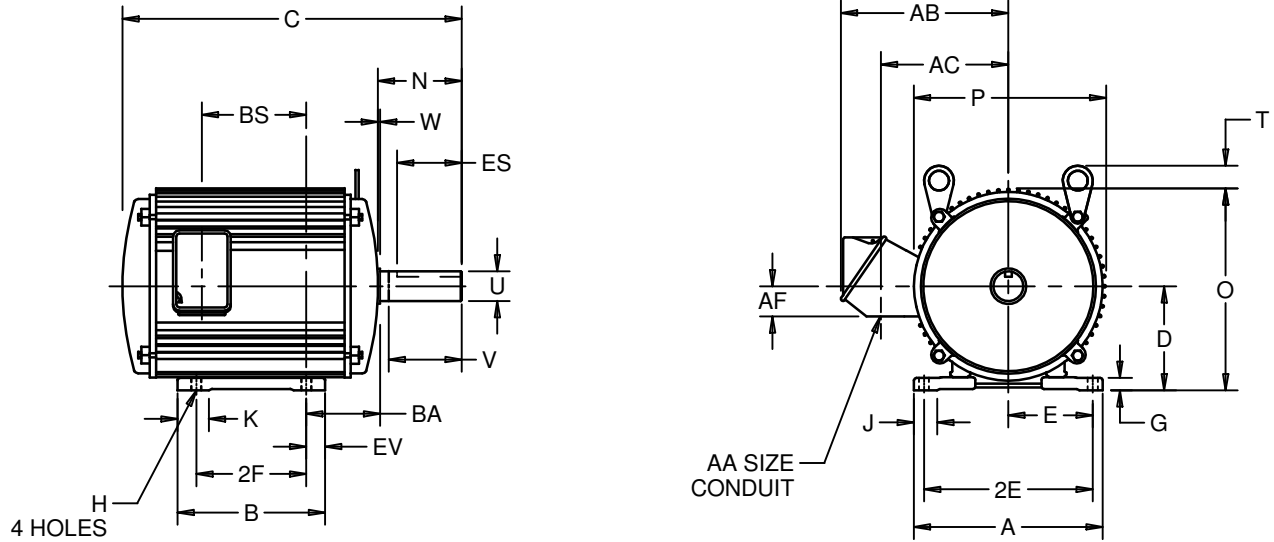

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	A	D -.06	E	2E ±.03	G	H +.05	J	K	N	O	P ²	T	U -.001
IN	11.38	6.25	5.00	10.00	.69	.53	1.38	2.00	4.13	11.60	10.70	0	1.625
MM	289	159	127	254	18	13	35	51	105	295	272	0	41.28

UNITS	V MIN	W	AA	AB	AC	AF	BA	ES MIN	EV	SQ KEY
IN	3.72	.13	1 1/4 NPT	9.94	7.63	1.81	4.25	2.28	1.22	.375
MM	94	3		252	194	46	108	58	31	9.53

FRAME	UNITS	B	C	2F ±.03	BS
254T	IN	10.69	20.90	8.25	7.80
	MM	272	531	210	198
256T	IN	12.44	22.70	10.00	9.50
	MM	316	577	254	241

- 1: ALL ROUGH CASTING DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
- 2: LARGEST MOTOR WIDTH.
- 3: FRAME REFERENCE: 12.500"/254"/14.250"/256
- 4: CONDUIT BOX MAY BE LOCATED ON EITHER SIDE OF MOTOR.
CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 180° REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
- 5: TOLERANCES SHOWN ARE IN INCHES ONLY.

07-2880/A

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY
N. SHELAR
APPROVED BY
R. KING

IHP_DP_NMCA (MAR-2011) SOLIDEDGE