


EFFECTIVE:  
**17-JUL-21**

**DIMENSION PRINT**  
ODP CLOSE COUPLED PUMP WITH OVERSIZE OUTLET BOX AND CANOPY CAP  
FRAME: 284, 286JM, JP  
BASIC TYPE: DF4, FDF4, DF1, FDF1

PRINT:  
**07-3495-01**

SUPERSEDES:  
**NEW**

SHEET:  
**1 OF 1**

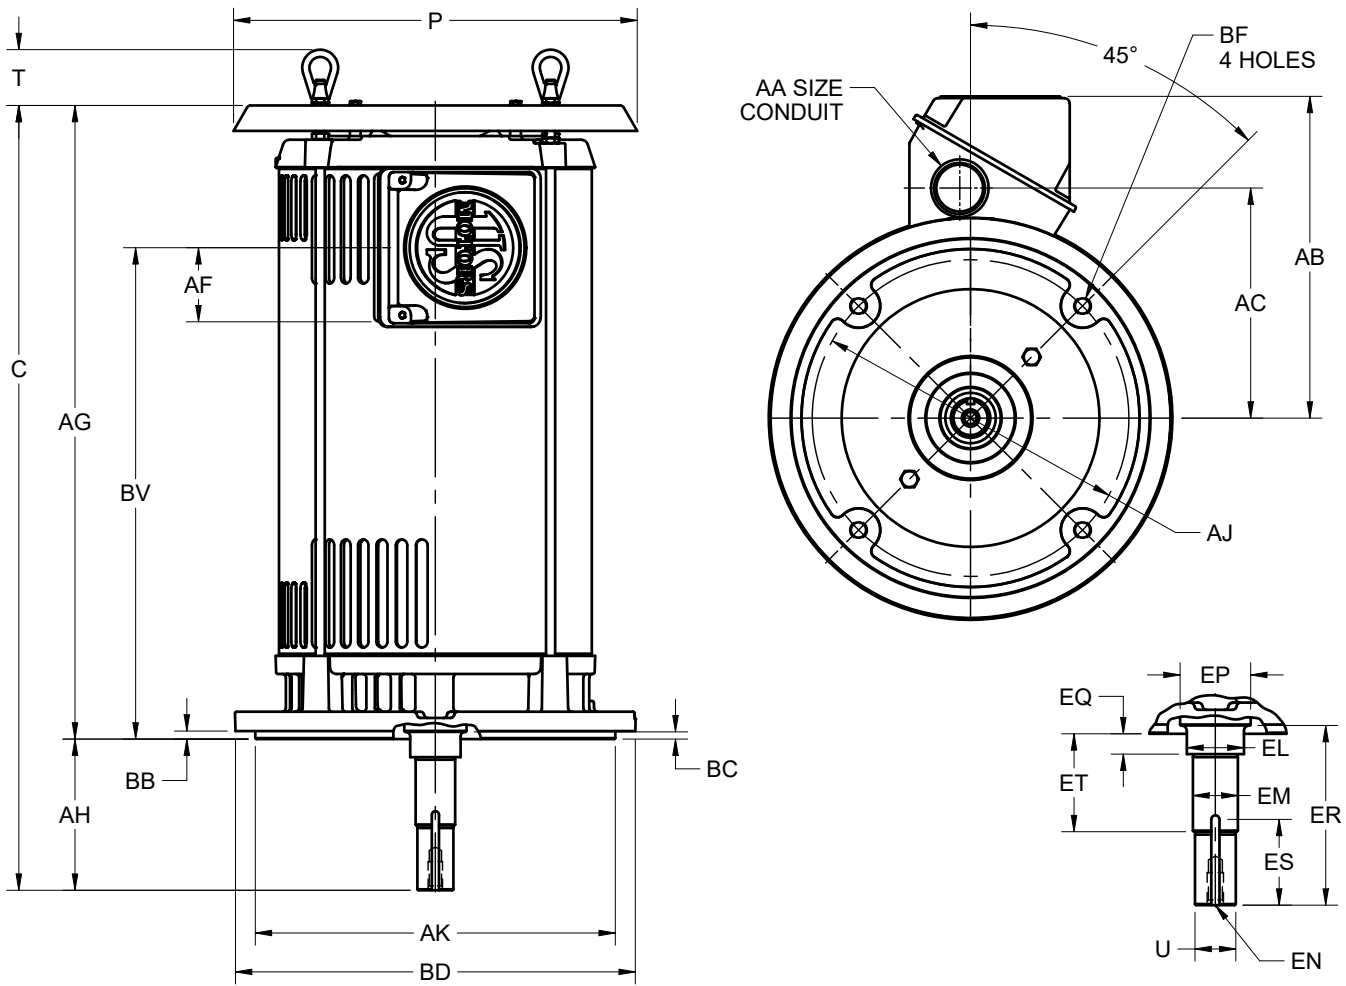

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	P <sup>2</sup>	T	U -.0005	AA	AB	AC	AF	AG	AJ	AK -.003	BB MIN	BC
IN	14.00	1.94	1.2495	1.50	11.19	8.00	2.59	22.00	11.000	12.500	.25	.25
MM	356	49	31.737		284	203	66	559	279.40	317.50	6	6

UNITS	BD MAX	BF <sup>3,4</sup>	BV	EL -.002	EM -.0005	EN <sup>3,4</sup>	EP MIN	ES MIN	SQ KEY
IN	14.00	5/8-11 X .94	17.06	1.750	1.3750	1/2-13 X 1.00	1.75	2.53	.250
MM	356		433	44.45	34.925		44	64	6.35

FRAME	UNITS	C	AH ±.031	EQ ±.015	ER MIN	ET ±.015
280JM	IN	27.25	5.250	.625	5.25	3.000
	MM	692	113.35	15.88	113	76.20
280JP	IN	30.13	8.125	2.375	8.13	5.875
	MM	765	206.38	60.33	207	149.23

TOLERANCES	
FACE RUNOUT	.004 TIR
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBIT	.004 TIR
PERMISSIBLE SHAFT RUNOUT	.002 TIR

- DIMENSIONS MAY VARY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS
- LARGEST MOTOR WIDTH
- ALL TAP HOLES ARE UNIFIED NATIONAL COARSE, RIGHT HAND THREAD
- TAP SIZE AND BOLT PENETRATION ALLOWANCE
- TOLERANCES ARE SHOWN IN INCHES ONLY
- FRAME REFERENCE: 284/286//17.25

07-3495-01/-

**Nidec Motor Corporation**  
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY  
**R. TIMMERMANN**  
APPROVED BY  
**E. O'HARA**

IHP\_DP\_NMCA (MAR-2011) SOLIDEDGE