

EFFECTIVE:  
**21-JUL-23**

# DIMENSION PRINT


## OPEN DRIPPROOF WITH WM OUTLET BOX

PRINT:  
**07-3545**

SUPERSEDES:  
**NEW**

FRAME: 360T  
BASIC TYPE: R

SHEET:  
**1 OF 1**

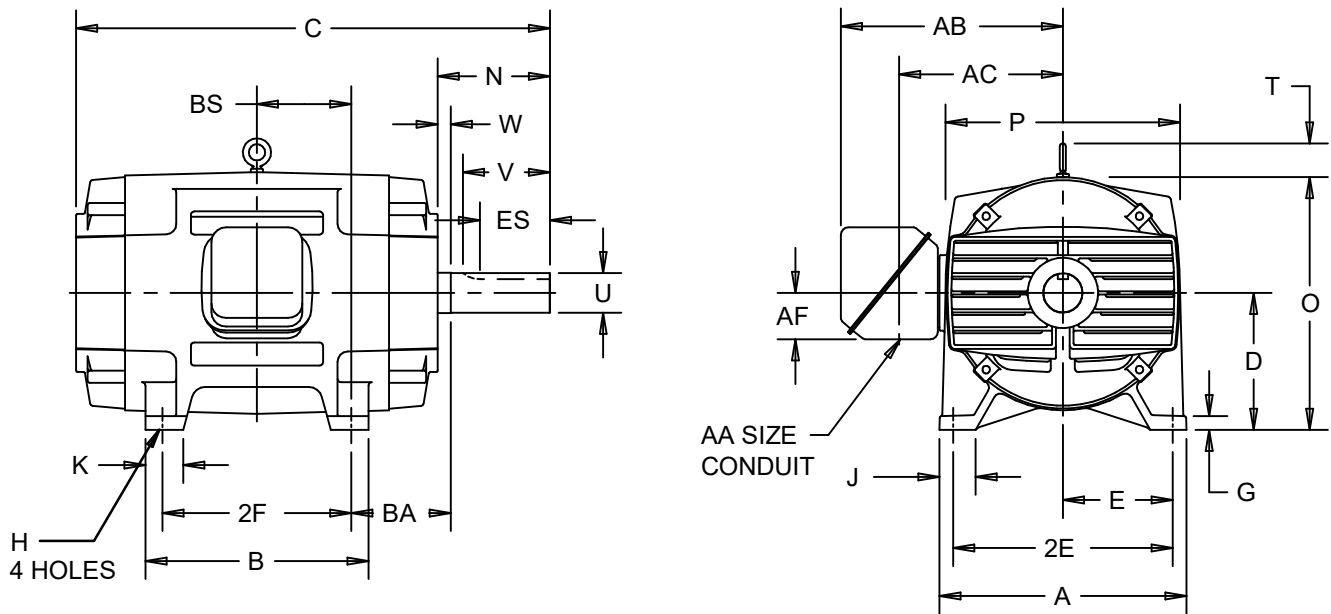

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	A	D -.06	E	2E ±.03	G	H +.05	J	K	N	O	P <sup>2</sup>	T
IN	17.75	9.00	7.00	14.00	.97	.66	3.53	2.63	6.13	17.75	18.16	2.50
MM	451	229	178	356	25	17	90	67	156	451	461	64

UNITS	U -.001	V MIN	W	AA	AB	AC	AF	BA	ES MIN	EV	SQ KEY
IN	2.375	5.63	.25	3.00	16.25	12.29	4.25	5.88	4.28	1.25	.625
MM	60.33	143	6		413	312	108	149	109	32	15.88

FRAME	UNITS	B	C	BS	2F ±.03
364T	IN	13.75	28.63	5.63	11.25
	MM	349	727	143	286
365T	IN	14.75	29.63	6.13	12.25
	MM	375	753	156	311

1: ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.  
2: LARGEST MOTOR WIDTH.  
3: TOLERANCE UNITS ARE IN INCHES ONLY.

4: STANDARD ASSEMBLY POSITION F-1 IS SHOWN. F-2 IS PROVIDED WHEN SPECIFIED. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90° REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.

07-3545/-

**Nidec Motor Corporation**  
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY  
**D. CORTES**  
APPROVED BY  
**E. OVIEDO**

IHP\_DP\_NMCA (MAR-2011) SOLIDEDGE