
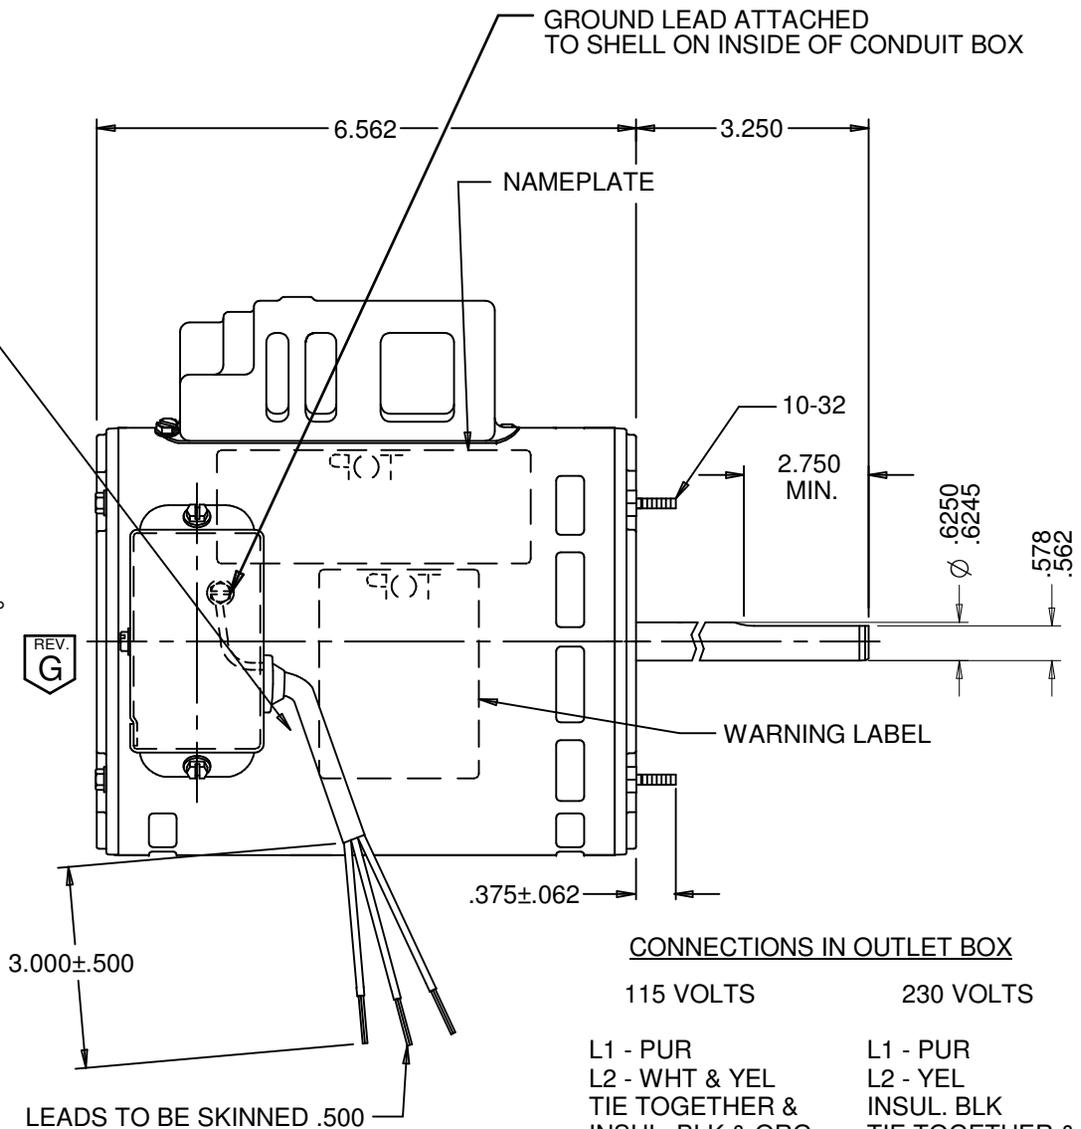


#18, 3 COND. SJT0W CORD 105°C
TO EXTEND BEYOND MOTOR 16.000 $\begin{matrix} +1.000 \\ -1.000 \end{matrix}$
(BLACK, WHITE & GREEN)

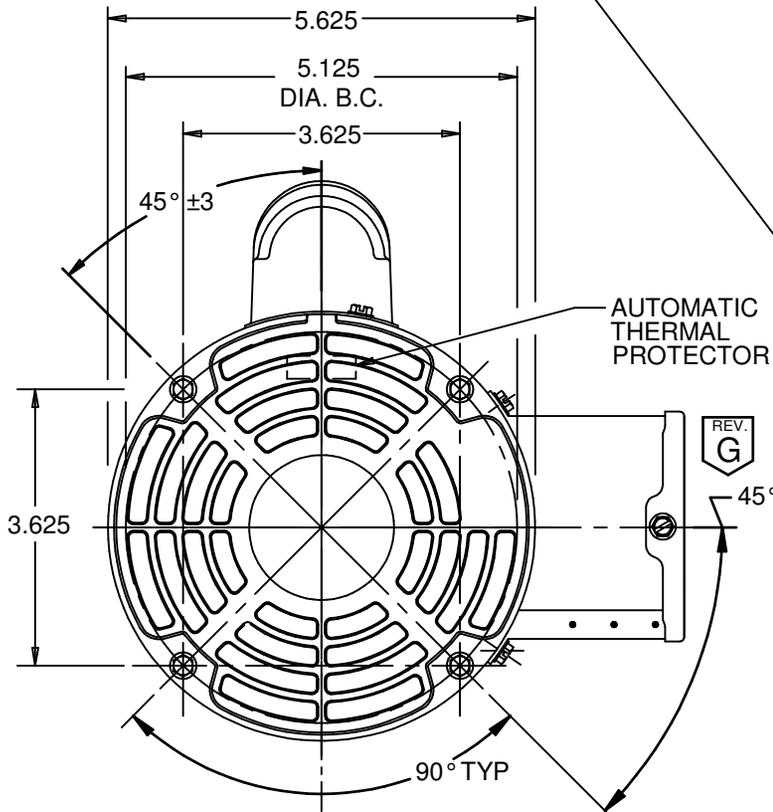

NOTE : MOTOR TO LEAVE FACTORY CONNECTED FOR 230 VOLT OPERATION

CONNECTIONS IN OUTLET BOX

- | | |
|---------------------------------|---------------------------------|
| 115 VOLTS | 230 VOLTS |
| L1 - PUR | L1 - PUR |
| L2 - WHT & YEL | L2 - YEL |
| TIE TOGETHER & INSUL. BLK & ORG | INSUL. BLK |
| | TIE TOGETHER & INSUL. WHT & ORG |

NIDEC MOTOR CORPORATION 11-Nov-15

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
K55HXEAE-7161		STANDARD	1/2	115/230	6.2/3.1	60	1100	CW LEAD END	4749

SHEET NUMBER	REV	REVISION RECORD FOR:
1 OF 1	G	E24260
		ADDED, SIDE VIEW OF COVER AND VIEW OF COVER SCREW.
REVISION DATE		
11-NOV-15		

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN

NIDEC MOTOR CORPORATION

TITLE: ASSEMBLED VIEW

CODE: V01

ITEM NO.: 753982

SIZE: A

ISSUED BY	REVIEWED BY	ENGINEER APPROVED
G. ISASSI	C. ROESSLER	K. HOLTZSCHER