


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	DESCRIPTION / REMARKS
001	P55DHH-1578	USEM	D1P1A	10.44	8.50	1.94	1.38	1	208-230/460	1.25	2.8-2.8/1.4	60	3450	-----	N56, ODP, REVERSIBLE, PROT-NONE

9 LEADS #18 W8C2 LEAD WIRE TO EXTEND 6.000 +2.000 - 0.000 THRU SHELL INTO CONDUIT BOX. ENDS TO BE SKINED .500 LEADS TO BE NUMBERED 1 THRU 9

1/2 IN CONDUIT HOLE (QTY. 4)

.19 SQUARE SHAFT KEY TAPED TO MOTOR

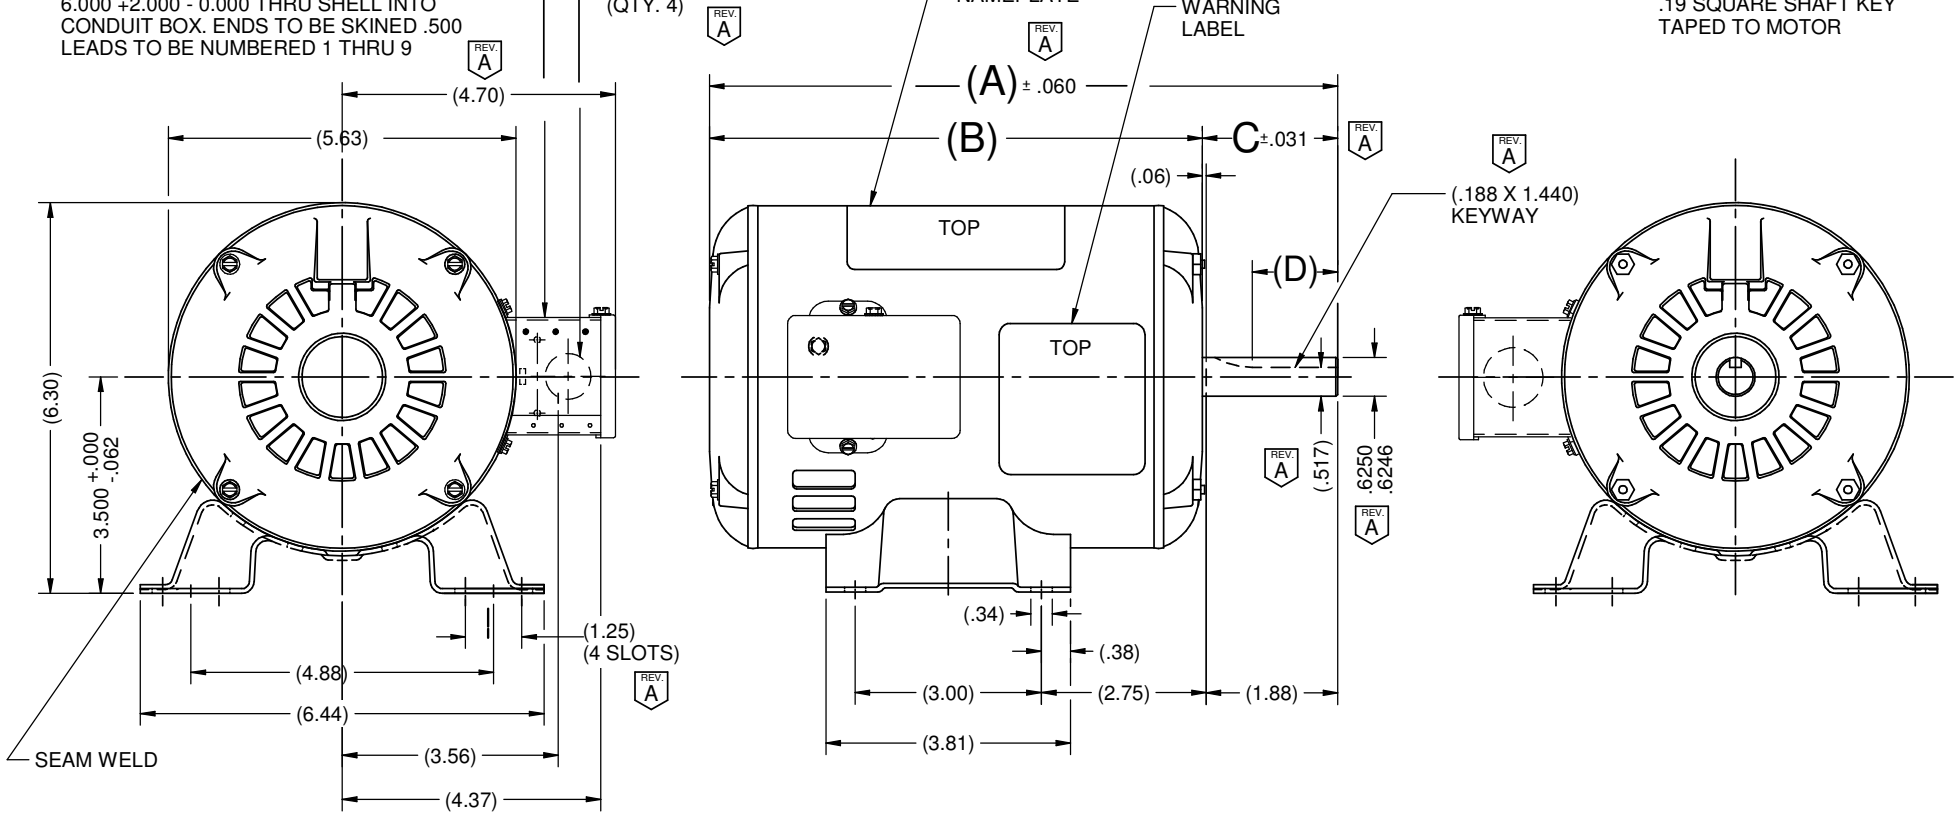

NIDEC MOTOR CORPORATION 08-May-15

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:	22868
UPDATED DIMENSIONS & NOTES	
ADDED CRITICAL REQ. & ANGLES	
ISSUED BY:	M. MEDINA
ENGINEER APPROVED:	M. SCHUETTE

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)	
INCHES	mm
.XX = ± .010	
.XXX = ± .005	
ANGLES X° = ±1°	

NIDEC MOTOR CORPORATION					
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION					REVISION DATE:
TITLE					08-MAY-15
CODE	ITEM NO.	REV	SHEET NUMBER	DWG SIZE	
V02	803405	A	1 OF 4	B	