


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	T55CPP-1520	USEM	D13CP2PCR	10.790	8.728	1.899	-----	1/3	115/230	1.35	3.8 / 1.9	60	1725	-----	NONE	56C ODP DRIPCOVER
002	T55JCRA-1530	USEM	D14CPA2PCR	10.790	8.728	1.899	-----	1/4	115/230	1.35	3.1 / 1.5	60	1725	-----	AUTO	56C ODP DRIPCOVER

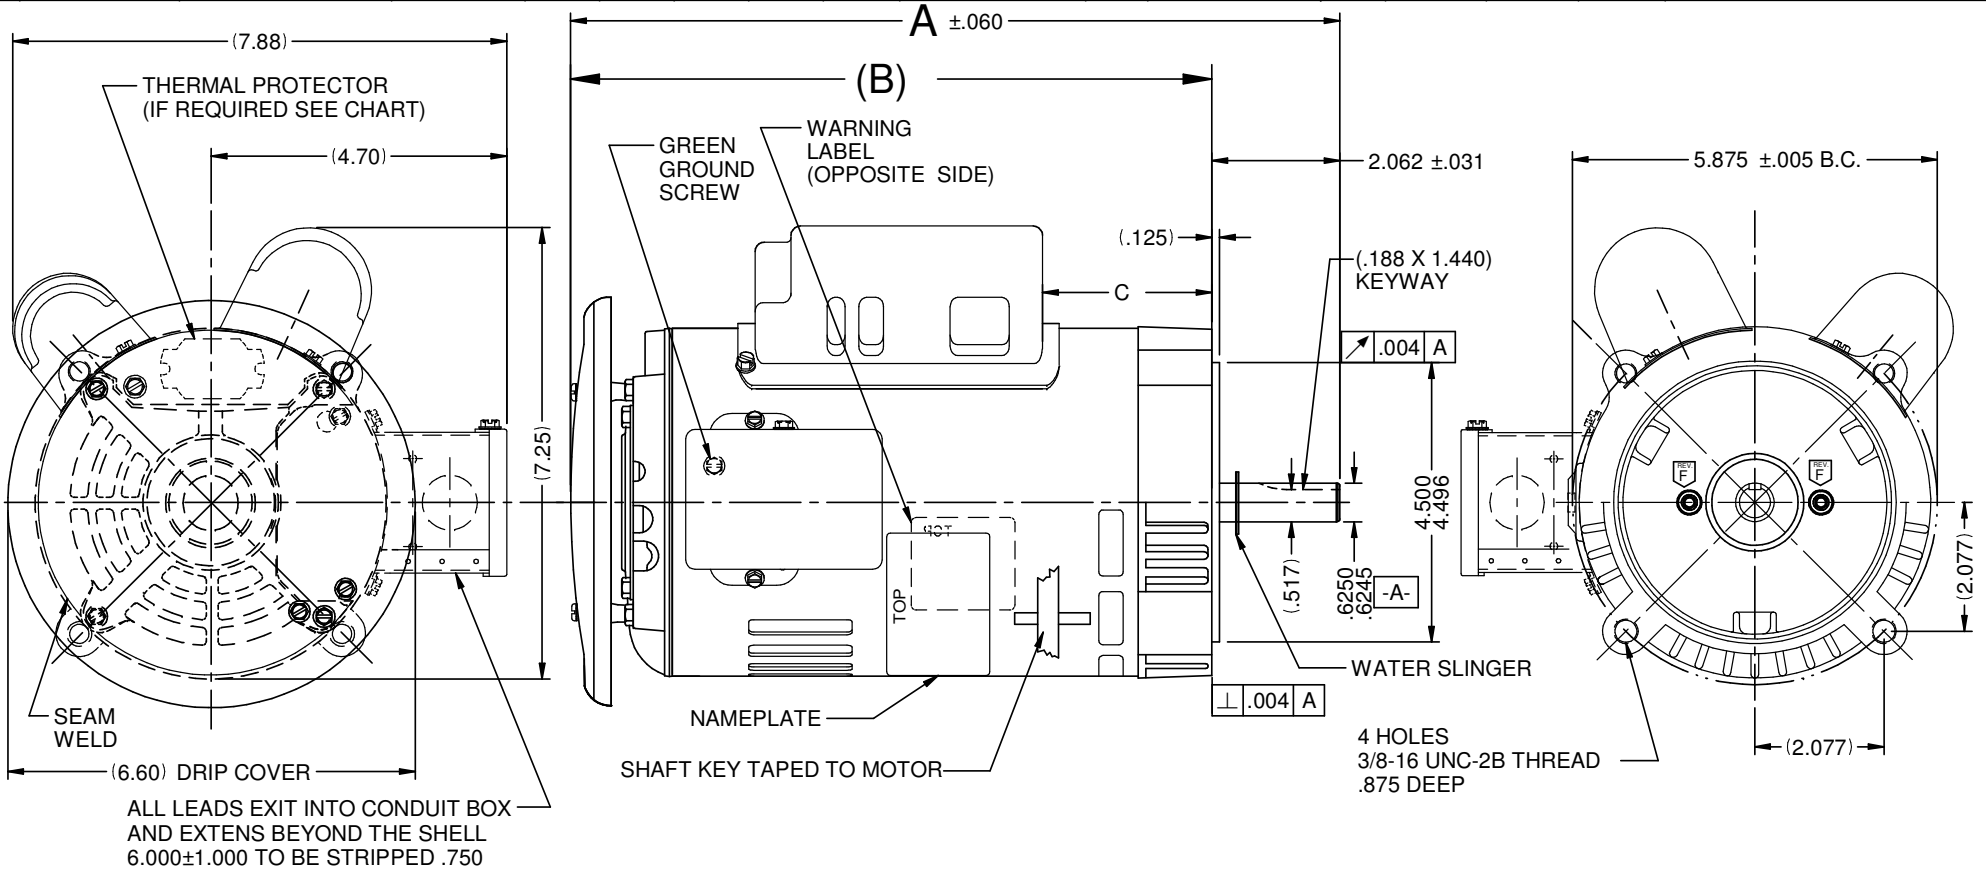

NIDEC MOTOR CORPORATION 02-Oct-18 MOTOR IS CCW ROTATION LEAD END, TO REVERSE INTERCHANGE RED WITH BLACK LEADS REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		NIDEC MOTOR CORPORATION				REVISION DATE:	
ECO: E31480								02-OCT-18	
UPDATED VIEW OF THE BEARING LOCK SCREW, WITHOUT SLOT.									
ISSUED BY: R. GUZMAN		ENGINEER APPROVED: J. SALINAS		INCHES .XX = ± .010 .XXX = ± .005		mm		TITLE: CUSTOMER DETAIL DRAWING	
		ANGLES X° = ± 1°				CODE: V02		ITEM NO.: 803617	
								REV: F	
								SHEET NUMBER: 1 OF 6	
								DWG SIZE: B	

V02\_NMCB (MAR-2014)

SOLIDEDGE