


VAR	MODEL	CUSTOMER	CAT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	P63TYAHR-1330	USEM	7913P	12.90	-----	-----	-----	1.5	200-230/460	1.15	4.8/2.4	60	1725	230	AUTO	N56HZ, ODP

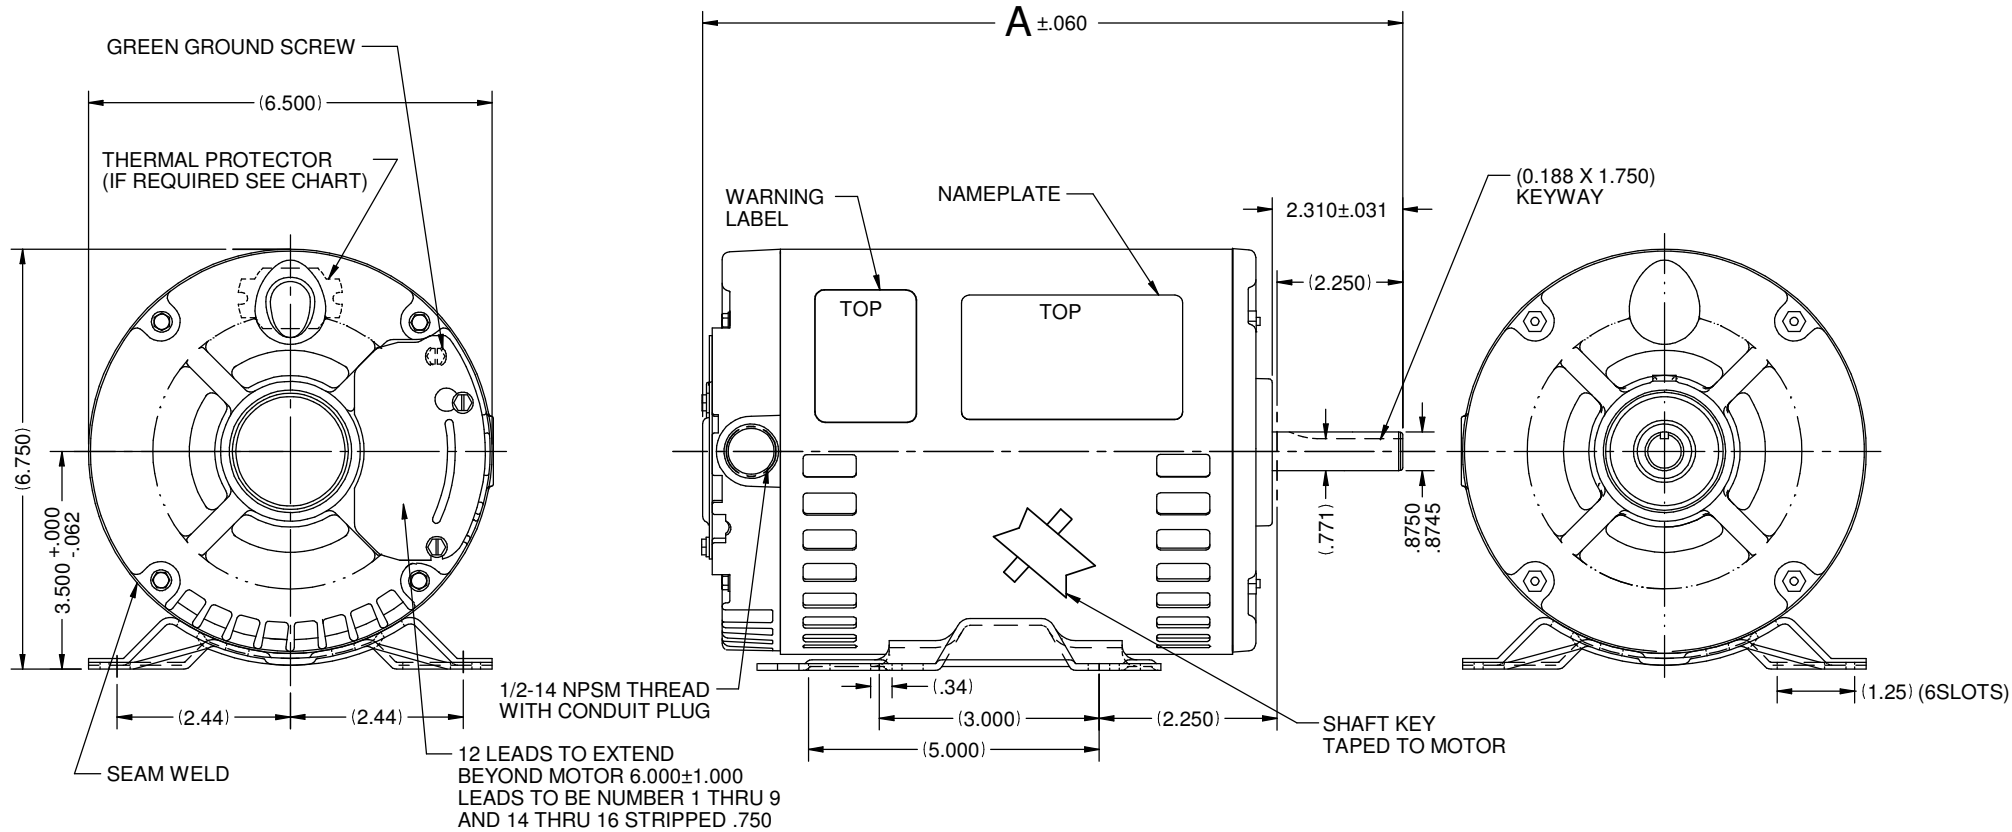

ROTATION - REVERSIBLE  
TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

REFER TO S.E.I.M. 24-1

NIDEC MOTOR CORPORATION 29-Jun-15

REVISION RECORD FOR: ECO: E23264  
DELETED NOTE IN PAGE 3 AND 4.

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)

INCHES .XX = ± .010 .XXX = ± .005	mm
ANGLES X° = ±1°	

**NIDEC MOTOR CORPORATION**

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REVISION DATE:  
**29-JUN-15**

ISSUED BY: **F. GARCIA**  
ENGINEER APPROVED: **S. SCHINZING**

TITLE  
**CUSTOMER DETAIL DRAWING**

CODE <b>V02</b>	ITEM NO. <b>803899</b>	REV <b>B</b>	SHEET NUMBER 1 OF 4	DWG SIZE <b>B</b>
--------------------	---------------------------	-----------------	------------------------	----------------------