


VAR	MODEL	CUSTOMER	CUSTOMER PN	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	C55KJT-4966	USEM	T14C2JC	11.12	-----	-----	3.07	1/4	115/208-230	1.15	6.5/2.8-3.2	60	1725	-----	NONE	ROTATION REVERSIBLE, BALL BEARING

(6) LEADS #18, .031 THICK INSULATION
 125°C INSUL. TO EXTEND BEYOND
 MOTOR INTO CONDUIT BOX
 BLACK=6.000±1.000, RED=6.000±1.000,
 BLUE=6.000±1.000, YELLOW=6.000±1.000,
 ORANGE=6.000±1.000 & WHITE=6.000±1.000.
 LEADS TO BE SKINNED .750±.125

SHAFT KEY TAPED TO MOTOR

4 HOLES, 3/8-16 UNC-2B
 THREAD .875 DEEP ON A
 5.875 DIA. BOLT CIRCLE

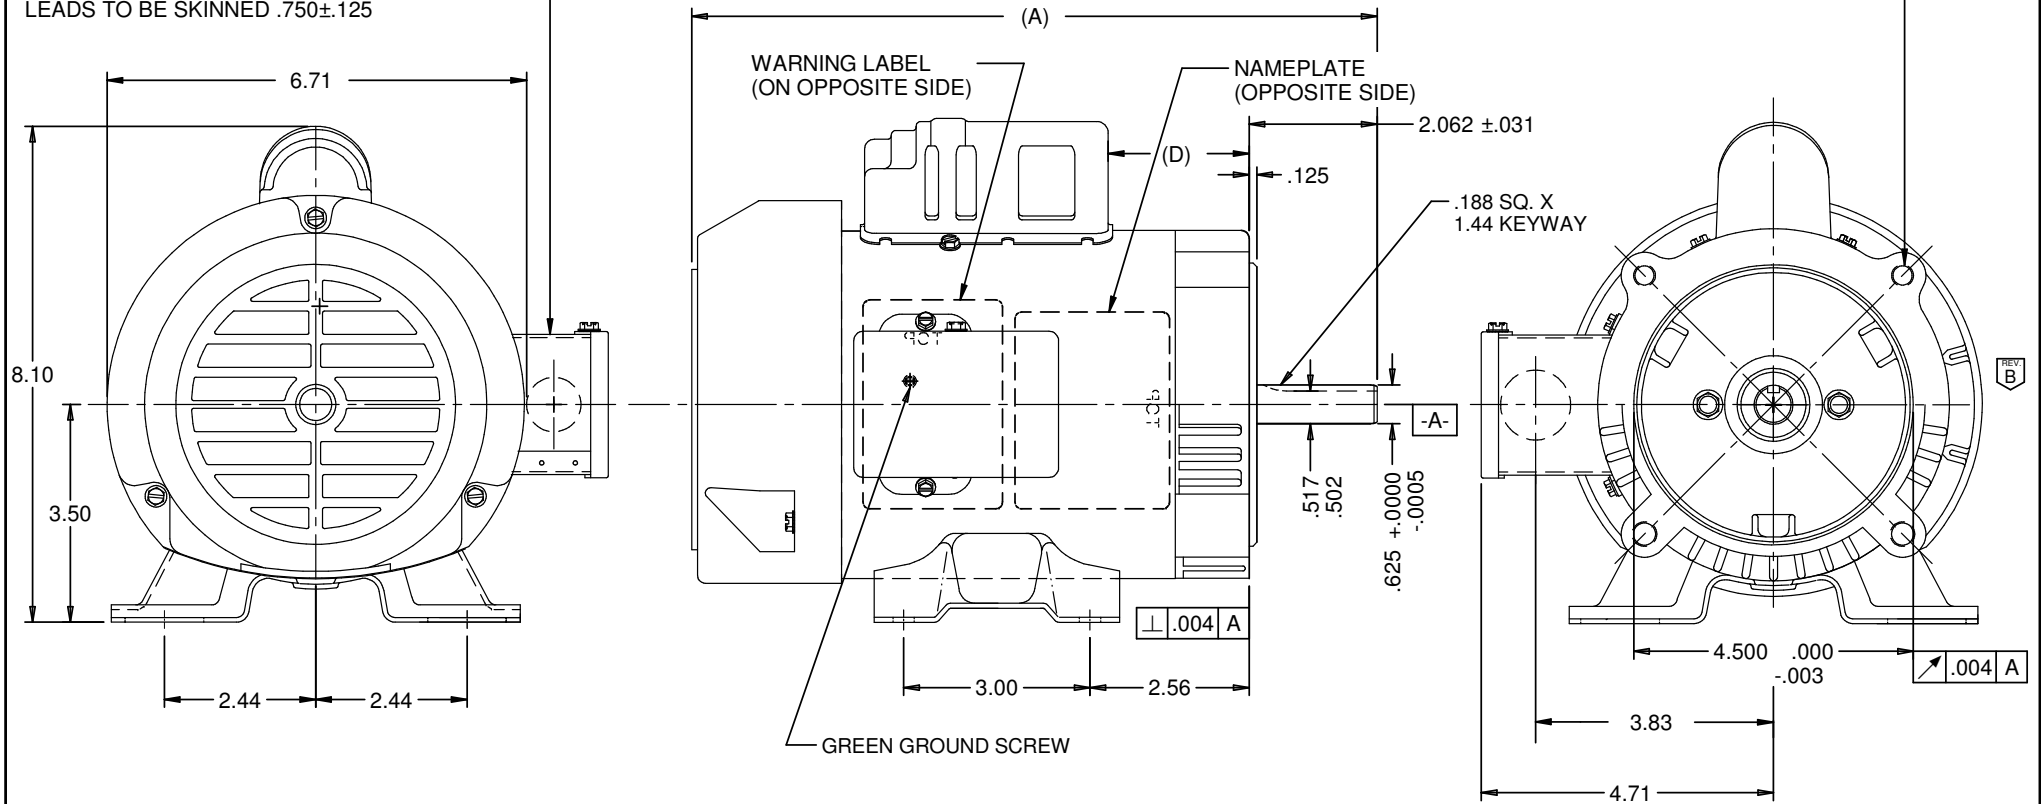

NIDEC MOTOR CORPORATION 15-Aug-18

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: ECO E31420
 CHANGED THE VIEW OF BOTH SCREWS TO S05820750 (SCREW WITHOUT SLOT).

TOLERANCES ON DIMENSIONS
 (UNLESS OTHERWISE SPECIFIED)

INCHES
 .XX = ± .010
 .XXX = ± .005

mm

ANGLES X° = ±1°

NIDEC MOTOR CORPORATION

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE
 REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REVISION DATE:
 22-AUG-18

ISSUED BY: G. ISASSI

ENGINEER APPROVED: J. SALINAS

TITLE
 CUSTOMER DETAIL DRAWING

CODE
 V02

ITEM NO.
 804461

REV
 B

SHEET
 NUMBER
 1 OF 6

DWG
 SIZE
 B