VAR	MODEL	CUSTOMER	CAT. NO.	A	BV	HP	VOLTS	SF	AMPS	HZ	RPM	PROTECTOR	DESCRIPTION / REMARKS
001	PH63GVABK-1113	USEM	XS1PA1ACR	13.77	8.94	1.0	208-230/460	1.15	3.2-3.0/1.5	60	3450	AUTO	N56C, TEFC
002	PH63GVABL-1114	USEM	XS1PA2ACR	14.77	9.94	1.0	208-230/460	1.15	3.2-3.1/1.5	60	1725	AUTO	N56C, TEFC

REV. B

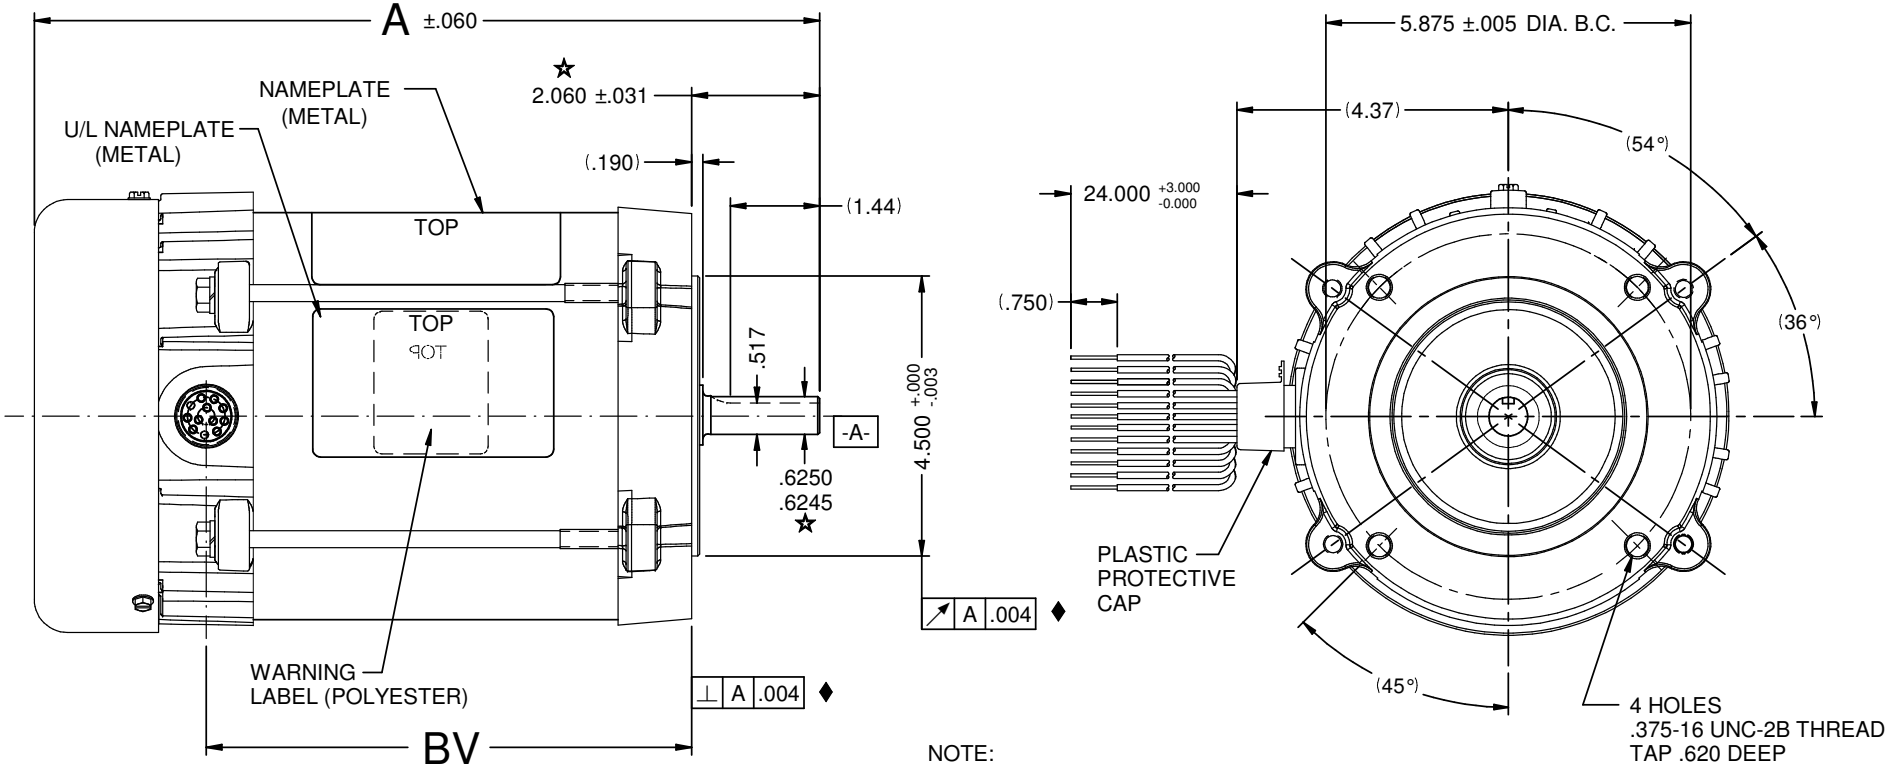

NOTE:

1.) CONDUIT BOX SUPPLIED DETACHED.
2.) SHAFT KEY TAPED TO MOTOR.

NIDEC MOTOR CORPORATION 09-Apr-18

ROTATION: REVERSIBLE

HAZARDOUS LOCATION MOTOR

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: ECO E30944

UPDATED CAT NO TO XS1PA1ACR

ISSUED BY : J. ALVARADO

ENGINEER APPROVED : T. BOSSALLER

TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)

INCHES	mm
.XX = ± .010 .XXX = ±.005	

ANGLES X°= ±1°

NIDEC MOTOR CORPORATION

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REVISION DATE : 09-APR-18

TITLE	CODE	ITEM NO.	REV	SHEET NUMBER	DWG SIZE
CUSTOMER DETAIL DRAWING	V02	807738	B	1 OF 4	B