



VAR	MODEL	CUSTOMER	PART NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	PROTECTOR	DESCRIPTION / REMARKS
001	P63ALY-1412	USEM	WDP32P2DFCR	14.25	12.19	-----	-----	1.5	208-230/460 & 190/380	1.0	4.9-4.8/2.4	60 & 50	1725 & 1425	NONE	N56C, TENV

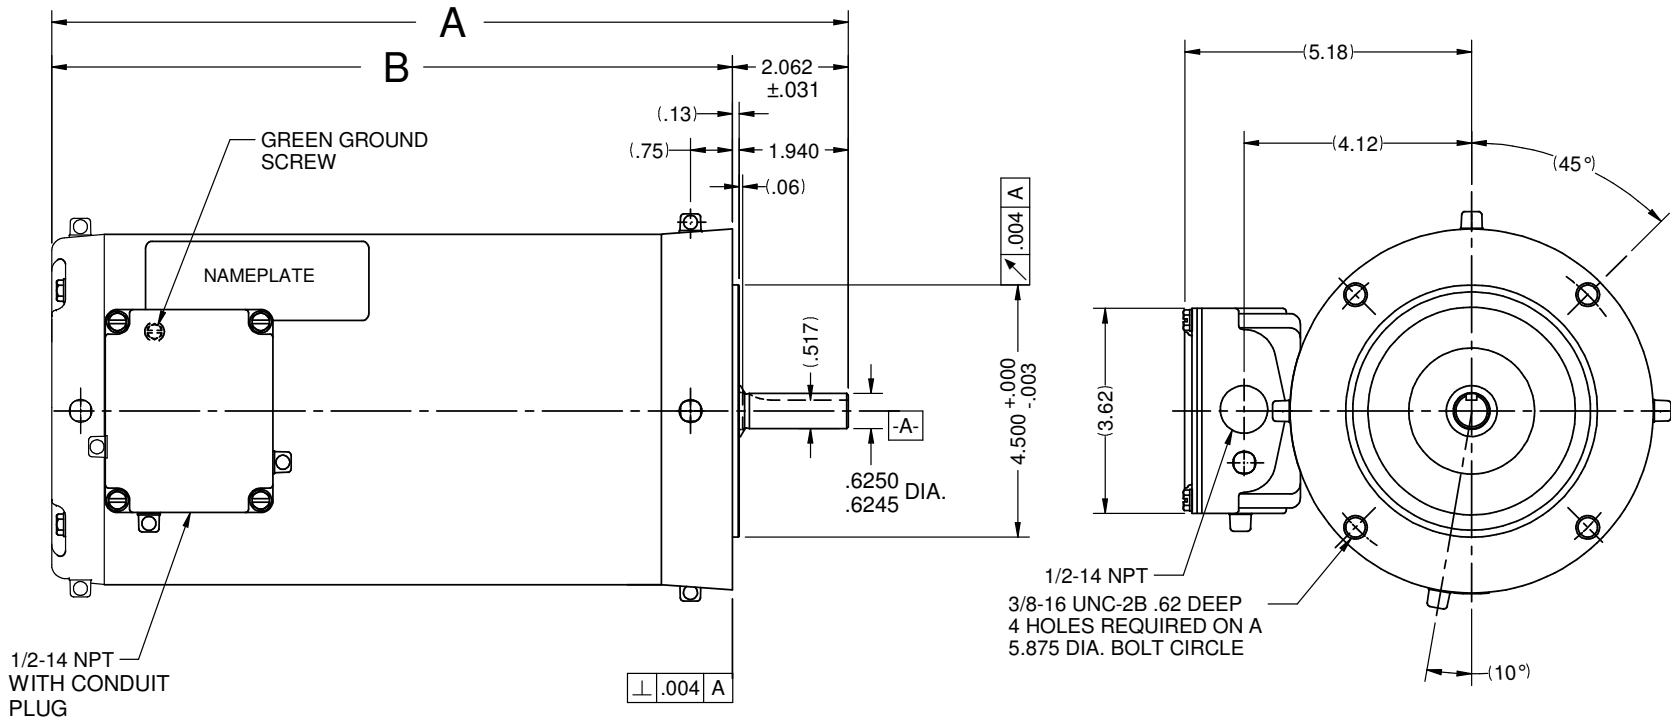

NOTE:
303 STAINLESS STEEL
SHAFT KEY SHIPPED
WITH MOTOR.

TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS. REFER TO S.E.I.M. 24-1

NIDEC MOTOR CORPORATION 18-May-16		REVISION RECORD FOR: ECO E25854		TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		NIDEC MOTOR CORPORATION						
DELETED NOTE OF GREEN GROUND SCREW IN PAGE 3 & 4.				INCHES .XX = ±.010 .XXX = ±.005		INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION						
ISSUED BY: I. GUTIERREZ		ENGINEER APPROVED: T. BOSSALLER		ANGLES X° = ±1°		TITLE: CUSTOMER DETAIL DRAWING		CODE: V02	ITEM NO.: 808663	REV: A	SHEET NUMBER: 1 OF 4	DWG SIZE: B
								REVISION DATE: 18-MAY-16				