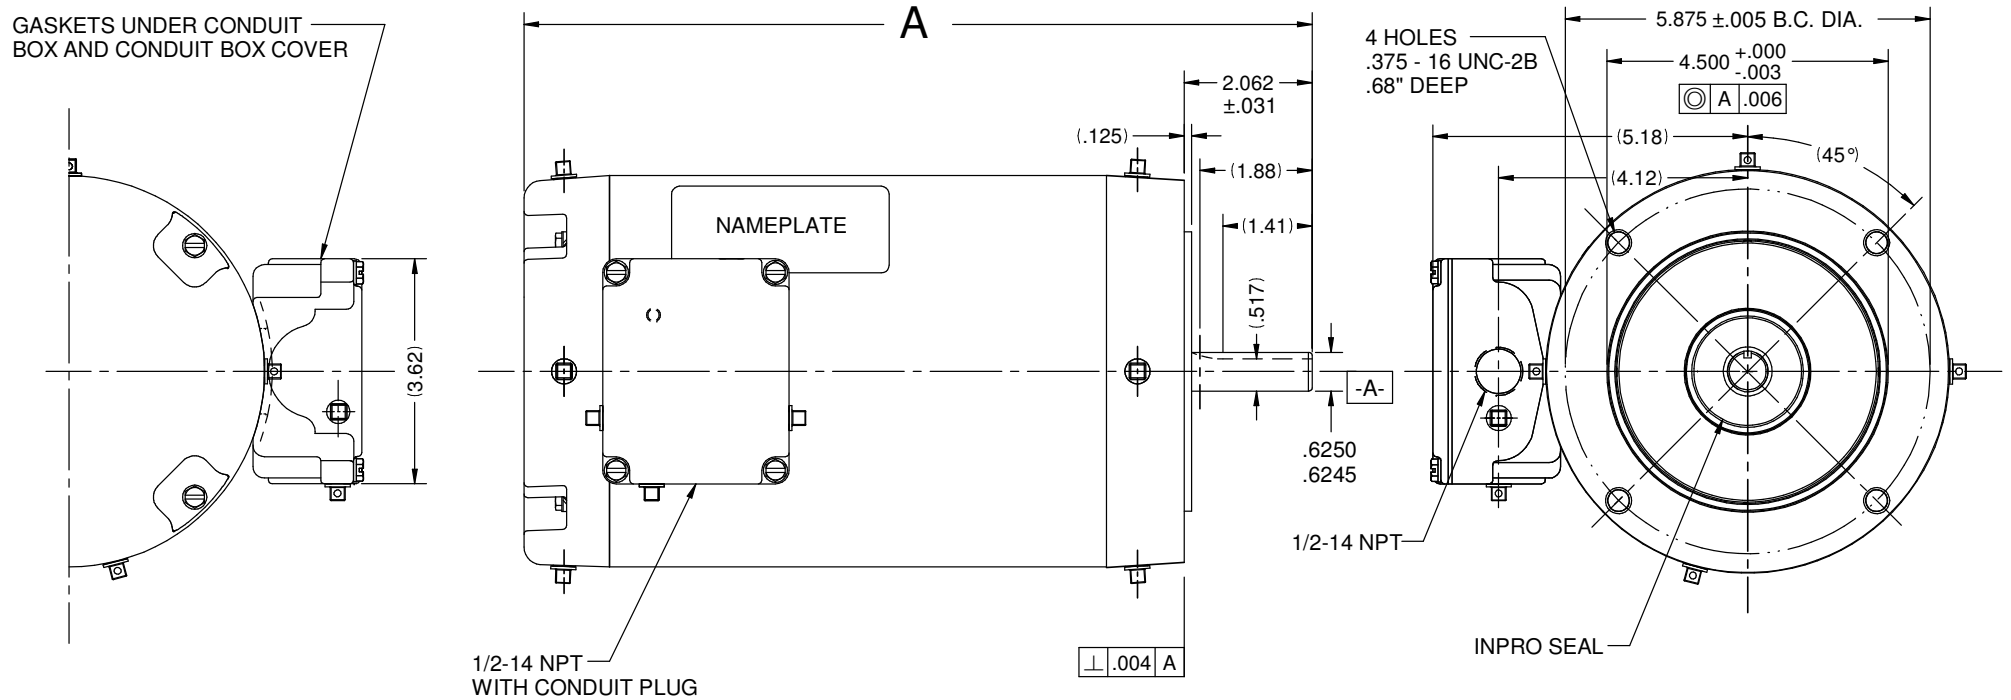


[illegible]

## CONNECTIONS

LO VOLTS

④—⑤—⑥

⑦      ⑧      ⑨

① ② ③

L1    L2    L3

HI VOLTS

④      ⑤      ⑥

⑦ ⑧ ⑨

① ② ③

L1    L2    L3

TO REVERSE ROTATION INTERCHANGE  
ANY TWO LINE LEADS.

NOTES:

- 1.) (11) 1/4-18 PLASTIC DRAIN PLUGS; (4) IN C-FACE  
(4) IN OPPOSITE SHAFT END ENDSHIELD AND (3)  
IN CONDUIT BOX.
- 2.) 303 STAINLESS STEEL SHAFT KEY SHIPPED WITH MOTOR.

NIDEC MOTOR CORPORATION 07-Jun-16

REVISION RECORD FOR:

ECO-E26041

CHANGED SEAM WELD LOCATION TO 6 O'CLOCK

DIMENSIONS ARE FOR  
REFERENCE ONLY

UNLESS TOLERANCE  
IS SPECIFIED

**NIDEC MOTOR CORPORATION**

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

REFER TO S.E.I.M. 24-1

REVISION DATE :	07-JUN-16
-----------------	-----------

ISSUED BY : C.ALMAGUER

ENGINEER APPROVED : T. BOSSALLER

TITLE  
CUSTOMER DETAIL DRAWING

CODE  
V02

ITEM NO.  
809204

REV	
A	

SHEET  
NUMBER  
1 OF 5

DWG SIZE B
------------------