
| MODEL | REF | CUSTOMER | HP | VOLTS | AMPS | HZ | RPM | ROTATION | CUSTOMER PT. NO. | DESCRIPTION / REMARKS |
|---------------|--------|---------------|-----|---------|------|----|-----------|---------------|------------------|-----------------------------------|
| K55HXRKY-2204 | C41353 | WHOLESALE HAC | 1/3 | 208-230 | 2.8 | 60 | 1625/3SPD | C.CW LEAD END | NA1034 | K55 RING OR STUD MTD S/A BRG OPEN |

NOTE: KIT WITH BRACKET ASSEMBLY. RINGS, SCREWS AND NUTS TO BE INCLUDED IN CARTON BOX.

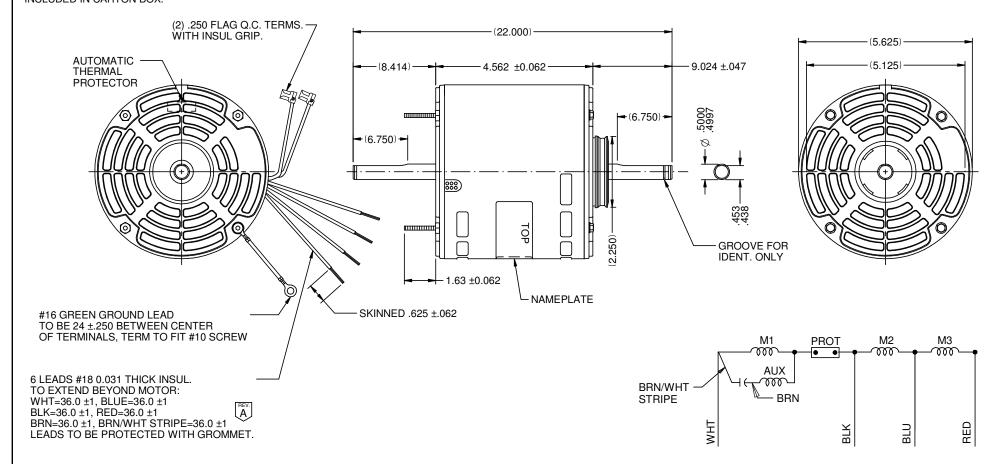

NIDEC MOTOR CORPORATION 24-Feb-16

REFER TO S.E.I.M. 24-1

| MIDLE WOTON CONTROLLET 60-10 | | | | | | | | | | | |
|--|-------------------------|---|----|---|-----|--------------------|--------------------------|---------------------------|------------------|--|--|
| REVISION RECO | | TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED) | | NIDEC MOTOR CORPORATION | | | | | | | |
| ELIMINATED NOTE FIGURES TO BE PRINTED ON LEADS | | | mm | INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSEDWITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION | | | REVISION DATE: 24-FEB-16 | | | | |
| ISSUED BY: I. NUÑEZ | APPROVED: A. VILLANUEVA | NCHES .XX = ± .010 .XXX = ±.005 ANGLES | | CUSTOMER DETAIL DRAWING | V02 | 1TEM NO. 809208 | REV A | SHEET NUMBER 1 OF 3 | DWG SIZE B | | |
| V02_NMCB (MAR-2014) | | | | | | | | | SOLIDEDGE | | |