



VAR	MODEL	CUSTOMER	CATALOG NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	PROTECTOR	BASE REQUIREMENT	DESCRIPTION / REMARKS
001	P63GBT-1480	USEM	WD1P2A14C	12.82	-----	-----	-----	1.0	208-230/460	1.15	3.4-3.3/1.8	60	1725	NONE	YES	N143TC, TENV, P86C306WHT

GASKETS UNDER CONDUIT BOX AND CONDUIT BOX COVER

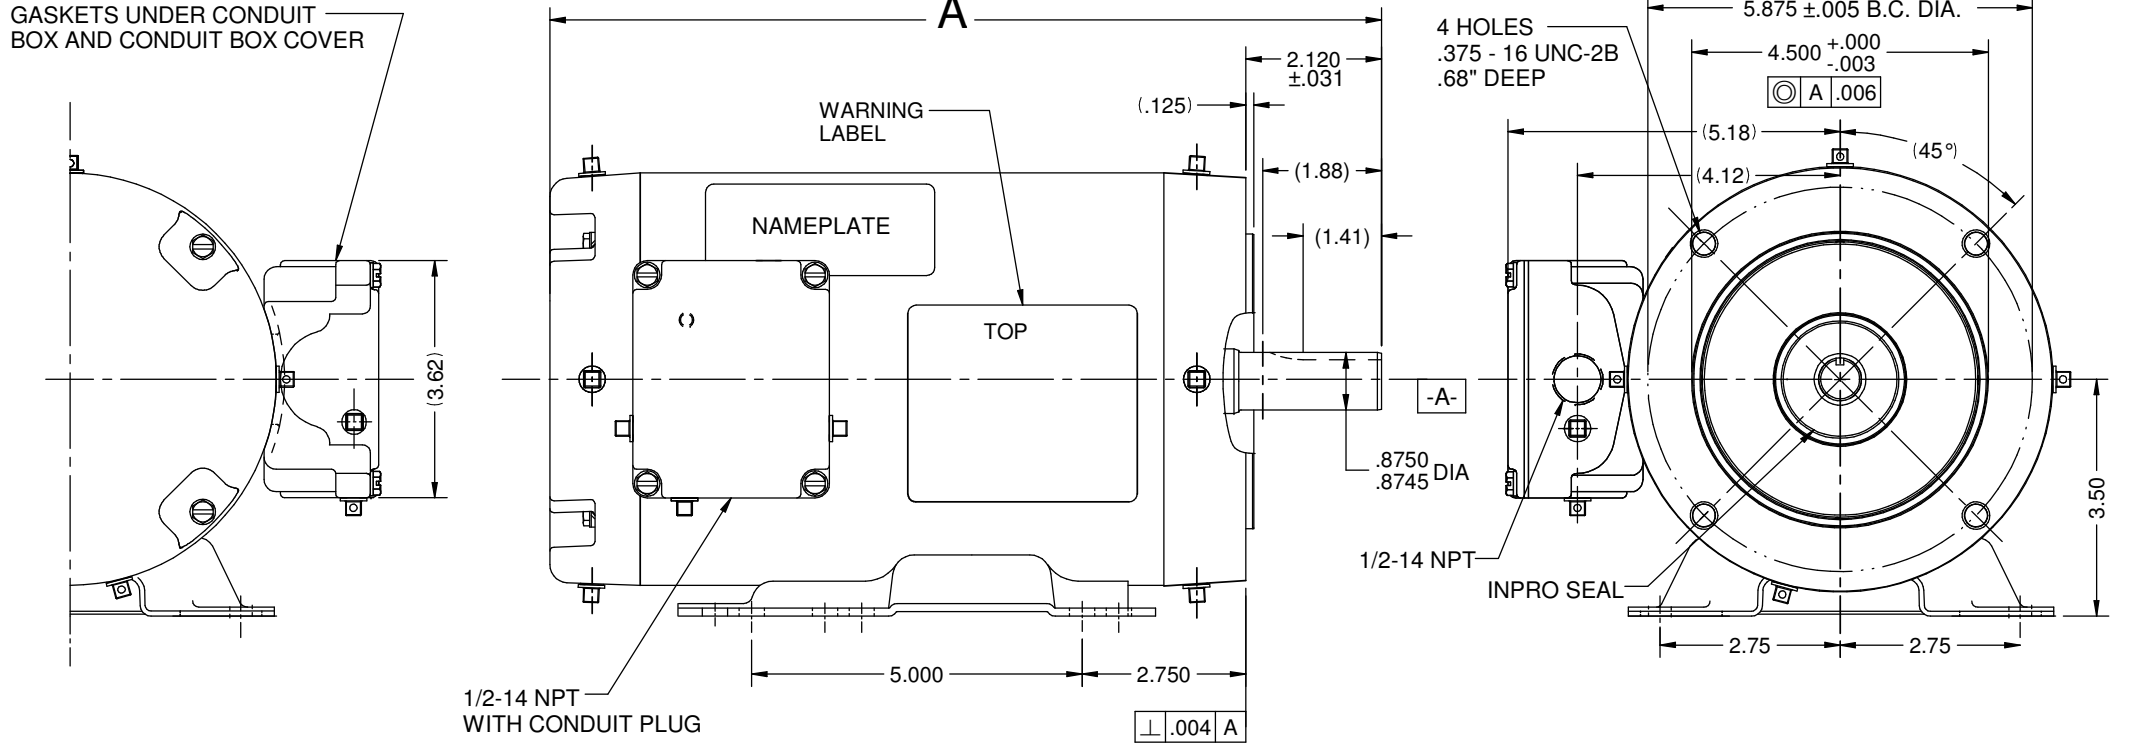

**CONNECTIONS**



TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

- NOTES:
- (11) 1/4-18 PLASTIC DRAIN PLUGS; (4) IN C-FACE (4) IN OPPOSITE SHAFT END ENDSHIELD AND (3) IN CONDUIT BOX.
  - 303 STAINLESS STEEL SHAFT KEY SHIPPED WITH MOTOR.

NIDEC MOTOR CORPORATION 29-Mar-16

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: JC 70816		DIMENSIONS ARE FOR REFERENCE ONLY		<b>NIDEC MOTOR CORPORATION</b>			
CREATED DRAWING		UNLESS TOLERANCE IS SPECIFIED		INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			
ISSUED BY: G. MEDINA		ENGINEER APPROVED: T. BOSSALLER		TITLE: CUSTOMER DETAIL DRAWING		CODE: V02	ITEM NO.: 810528
						REVISION DATE: 29-MAR-16	REV: --
						SHEET NUMBER: 1 OF 5	DWG SIZE: B