



VAR	MODEL	CUSTOMER	CATALOG NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	PROTECTOR	DESCRIPTION / REMARKS
001	P63GBR-1479	USEM	WD1P2A14CR	12.82	-----	-----	-----	1.0	208-230/460&190/380	1.15	3.4-3.3/1.8	60&50	1725&1425	NONE	N143TC, TENV, P86C306WHT

GASKETS UNDER CONDUIT BOX AND CONDUIT BOX COVER

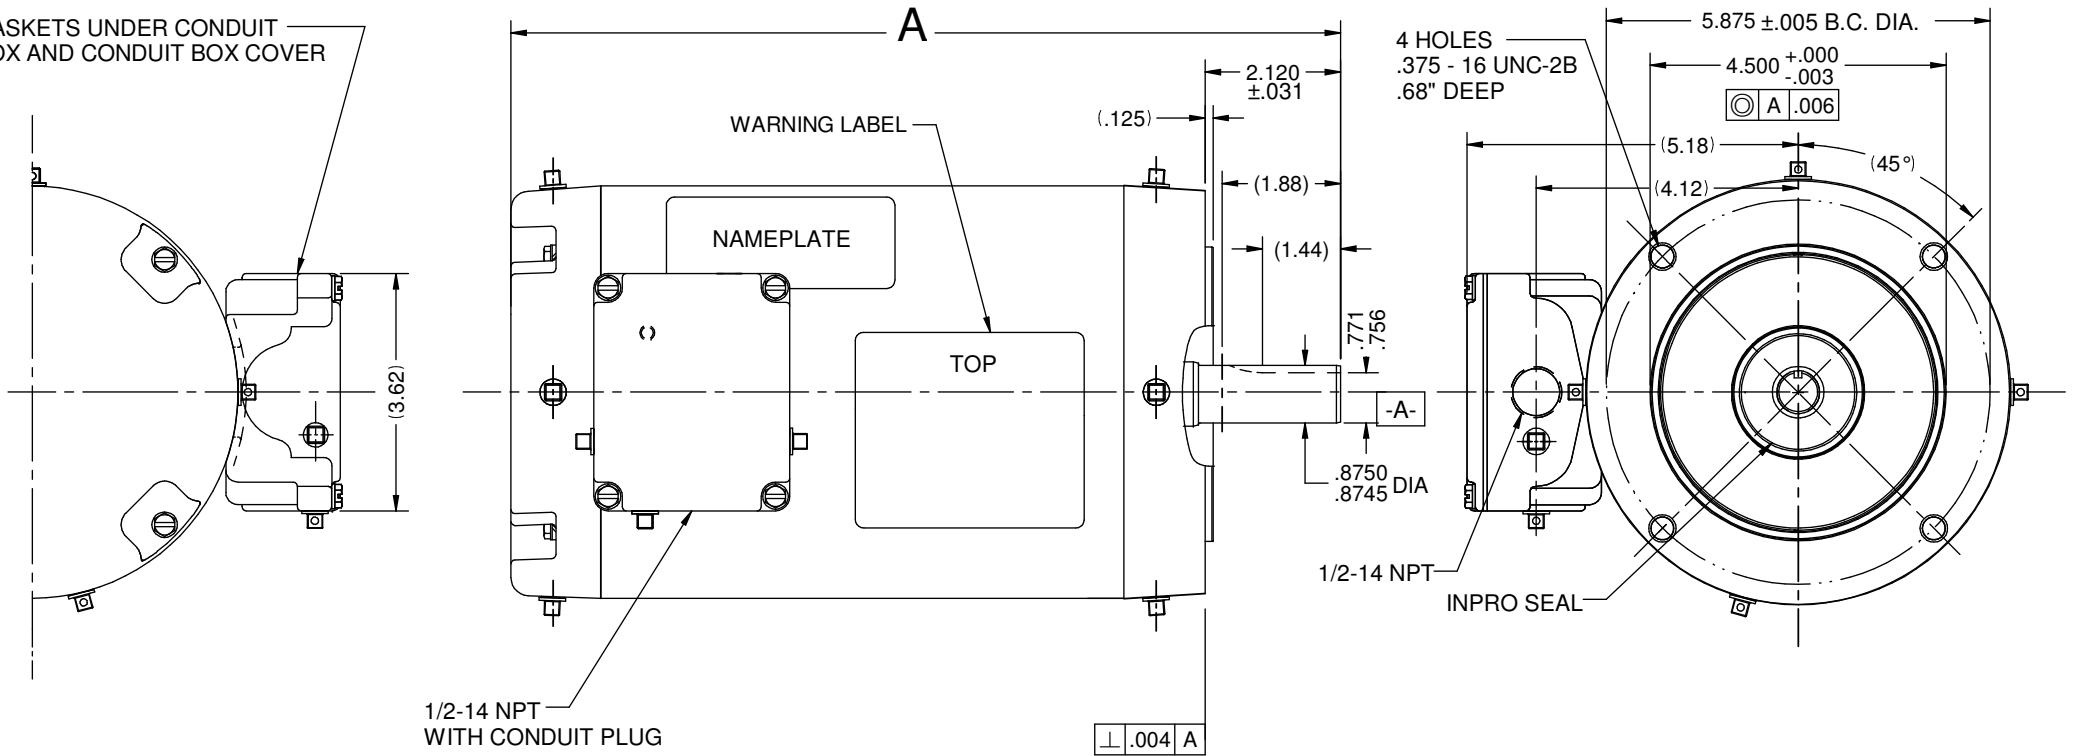

CONNECTIONS



TO REVERSE ROTATION INTERCHANGE ANY TWO LINE LEADS.

NOTES:

- (11) 1/4-18 PLASTIC DRAIN PLUGS; (4) IN C-FACE (4) IN OPPOSITE SHAFT END ENDSHIELD AND (3) IN CONDUIT BOX.
- 303 STAINLESS STEEL SHAFT KEY SHIPPED WITH MOTOR.

NIDEC MOTOR CORPORATION 30-Mar-16

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR:		JC 70822
CREATED DRAWING		
ISSUED BY:	C. RODRIGUEZ	ENGINEER APPROVED: T. BOSSALLER

DIMENSIONS ARE FOR REFERENCE ONLY
UNLESS TOLERANCE IS SPECIFIED

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DRAWING IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION		REVISION DATE: 30-MAR-16	
TITLE	CODE	ITEM NO.	REV
CUSTOMER DETAIL DRAWING	V02	810571	--
			SHEET NUMBER 1 OF 5
			DWG SIZE B