


MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CATALOG NO.	DESCRIPTION / REMARKS
K55HXRTZ-9535		STANDARD	1/4	277	2.0	60	1075/3 SPD	CCW LE REV	600	

#16 GRN/YEL GROUND LEAD TO BE  
12.000±.250 BETWEEN CENTERS  
OF TERMS. TERM. TO FIT  
#10 SCREW



AUTOMATIC  
THERMAL  
PROTECTOR

WARNING LABEL TO BE  
ADJACENT TO REVERSING  
LEADS

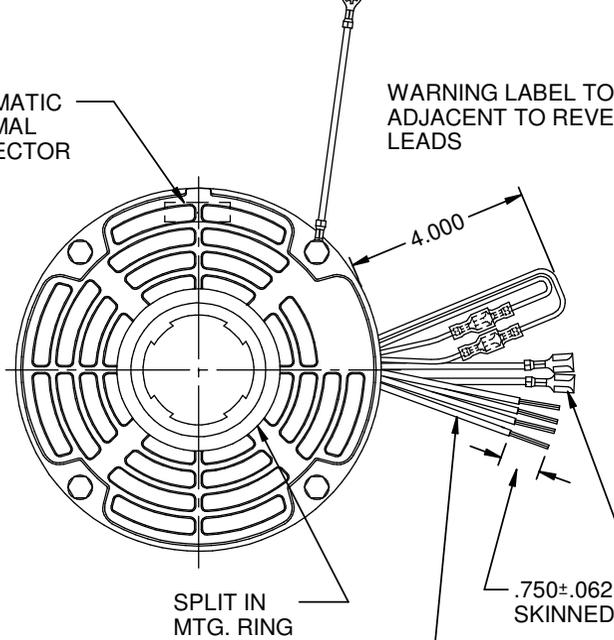

6 LEADS, #18, .031 THICK INSUL.  
TO EXTEND BEYOND MOTOR:  
PUR(C)=24.000 +2-0, BLK(1)=23.250 +2-0,  
BLU(2)=23.250 +2-0, RED(3)=23.250 +2-0,  
BRN=24.000 +2-0 & BRN/WHT=24.000 +2-0  
FIGURES TO BE PRINTED ON LEADS


ROTATION: CCW VIEWING LEAD END  
WITH ORG-ORG AND YEL-YEL  
TO REV. ROTATION INTERCHANGE  
ORG. AND YEL LEADS.

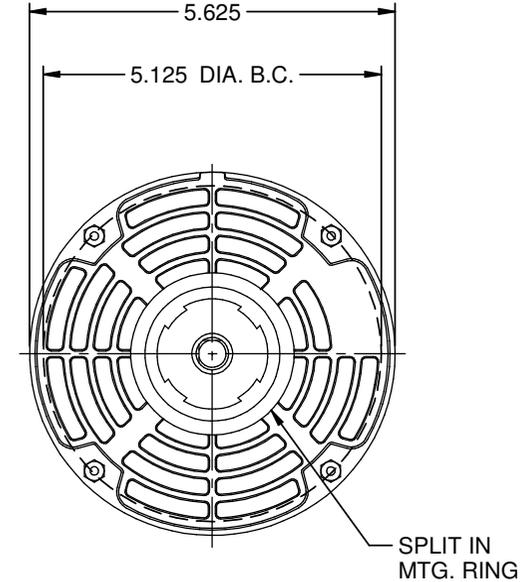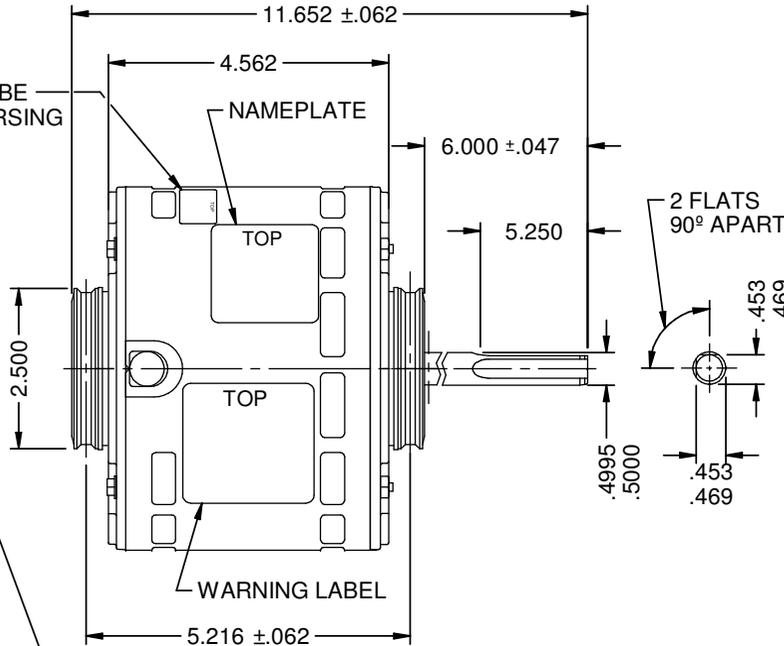

(2) .250 STRAIGHT  
TYPE Q.C. TERMS.

COLOR CODE  
PURPLE - COMMON  
BLACK - HIGH  
BLUE - MED  
RED - LOW  
BROWN - CAPACITOR  
BRN/WHT - CAPACITOR

4.0 MFD 370V  
CAPACITOR

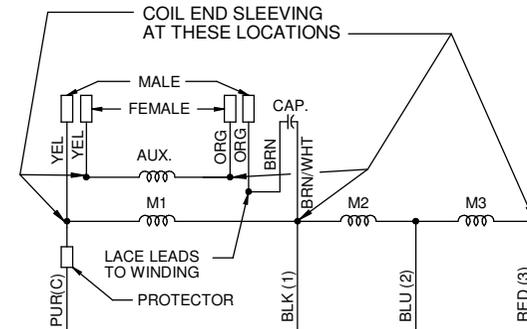

NIDEC MOTOR CORPORATION 23-May-17

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: E28700		DIMENSIONS ARE FOR REFERENCE ONLY	<b>NIDEC MOTOR CORPORATION</b>						
CREATED DRAWING:			INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION		REVISION DATE: <b>23-MAY-17</b>				
ISSUED BY: G. MEDINA		UNLESS TOLERANCE IS SPECIFIED	TITLE <b>CUSTOMER DETAIL DRAWING</b>		CODE <b>V02</b>	ITEM NO. <b>815745</b>	REV -	SHEET NUMBER 1 OF 3	DWG SIZE <b>B</b>
ENGINEER APPROVED: H. NAVARRO									