


MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CATALOG NO.	DESCRIPTION / REMARKS
KA55HXSGR-9929		STANDARD	1/4	230	1.6	60	1625/3 SPD	CCW LEAD END	8725	

#16 GREEN GROUND LEAD TO BE 6.000±.250 BETWEEN CENTERS OF TERMS. TERM. TO FIT #10 SCREW

AUTOMATIC THERMAL PROTECTOR


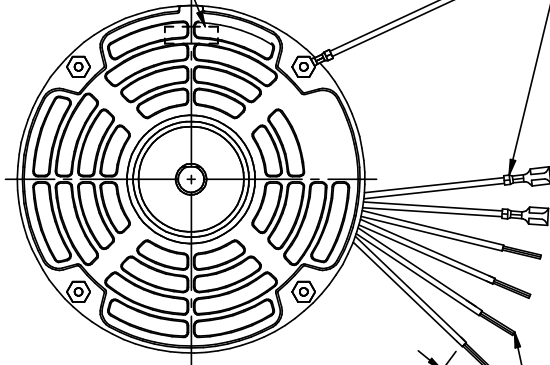


.750±.062 SKINNED

6 LEADS #18, .031 THICK INSUL. TO EXTEND BEYOND MOTOR:
 WHT(C)= 24.000 +2-0, BLK(1)= 24.000 +2-0
 BLU(2)= 24.000 +2-0, RED(3)= 24.000 +2-0
 BRN/WHT= 24.000 +2-0, BRN= 24.000 +2-0
 FIGURES ARE PRINTED ON LEAD.
 LEADS TO BE PROTECTED WITH A GROMMET

(2) .250 STRAIGHT TYPE Q.C. TERM. WITH INSUL. GRIP ON BROWN AND BRN/WHT LEADS

IDENTIFICATION GROOVE THIS END

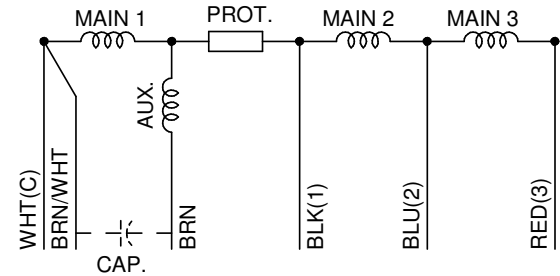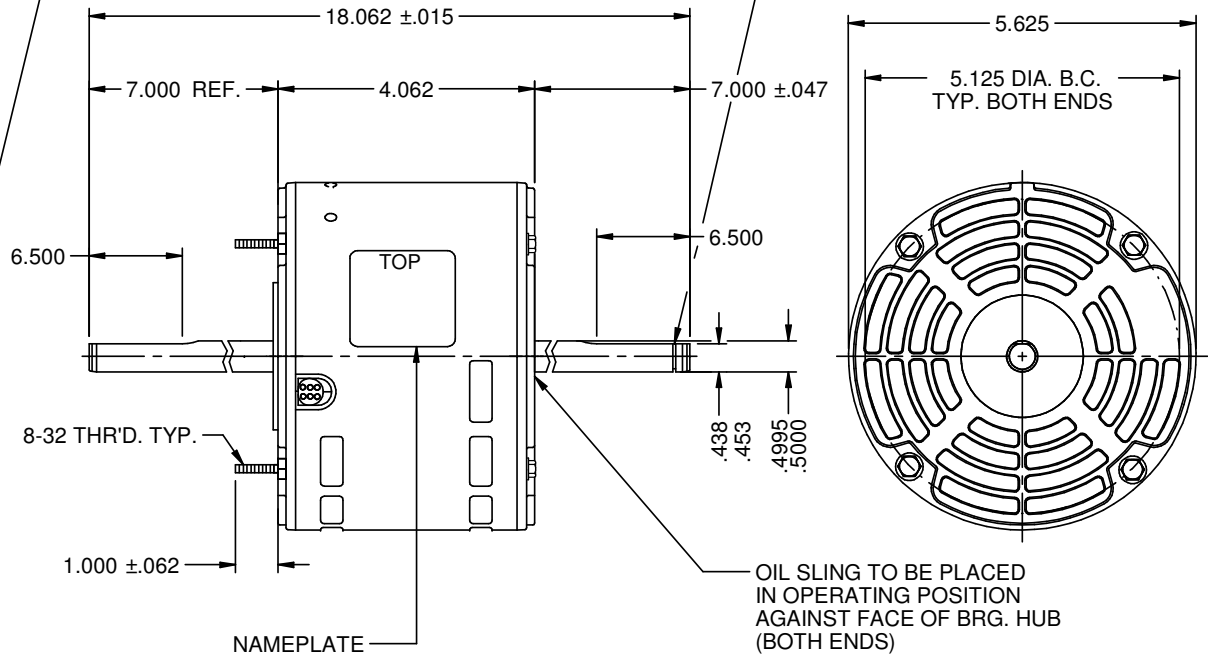

NIDEC MOTOR CORPORATION 25-May-17

REFER TO S.E.I.M. 24-1

CREATED DRAWING.	REVISION RECORD FOR: E28700
ISSUED BY: G. MEDINA	ENGINEER APPROVED: H. NAVARRO

DIMENSIONS ARE FOR REFERENCE ONLY
 UNLESS TOLERANCE IS SPECIFIED

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			
TITLE		REVISION DATE:	
CUSTOMER DETAIL DRAWING		23-MAY-17	
CODE	ITEM NO.	REV	SHEET NUMBER
V02	815752	-	1 OF 3
			DWG SIZE
			B