



MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CATALOG NO.	DESCRIPTION / REMARKS
K55HXSPL-3136		STANDARD	1/2	230	4.5	60	1075/3SPD	CCW LEAD END	3136	

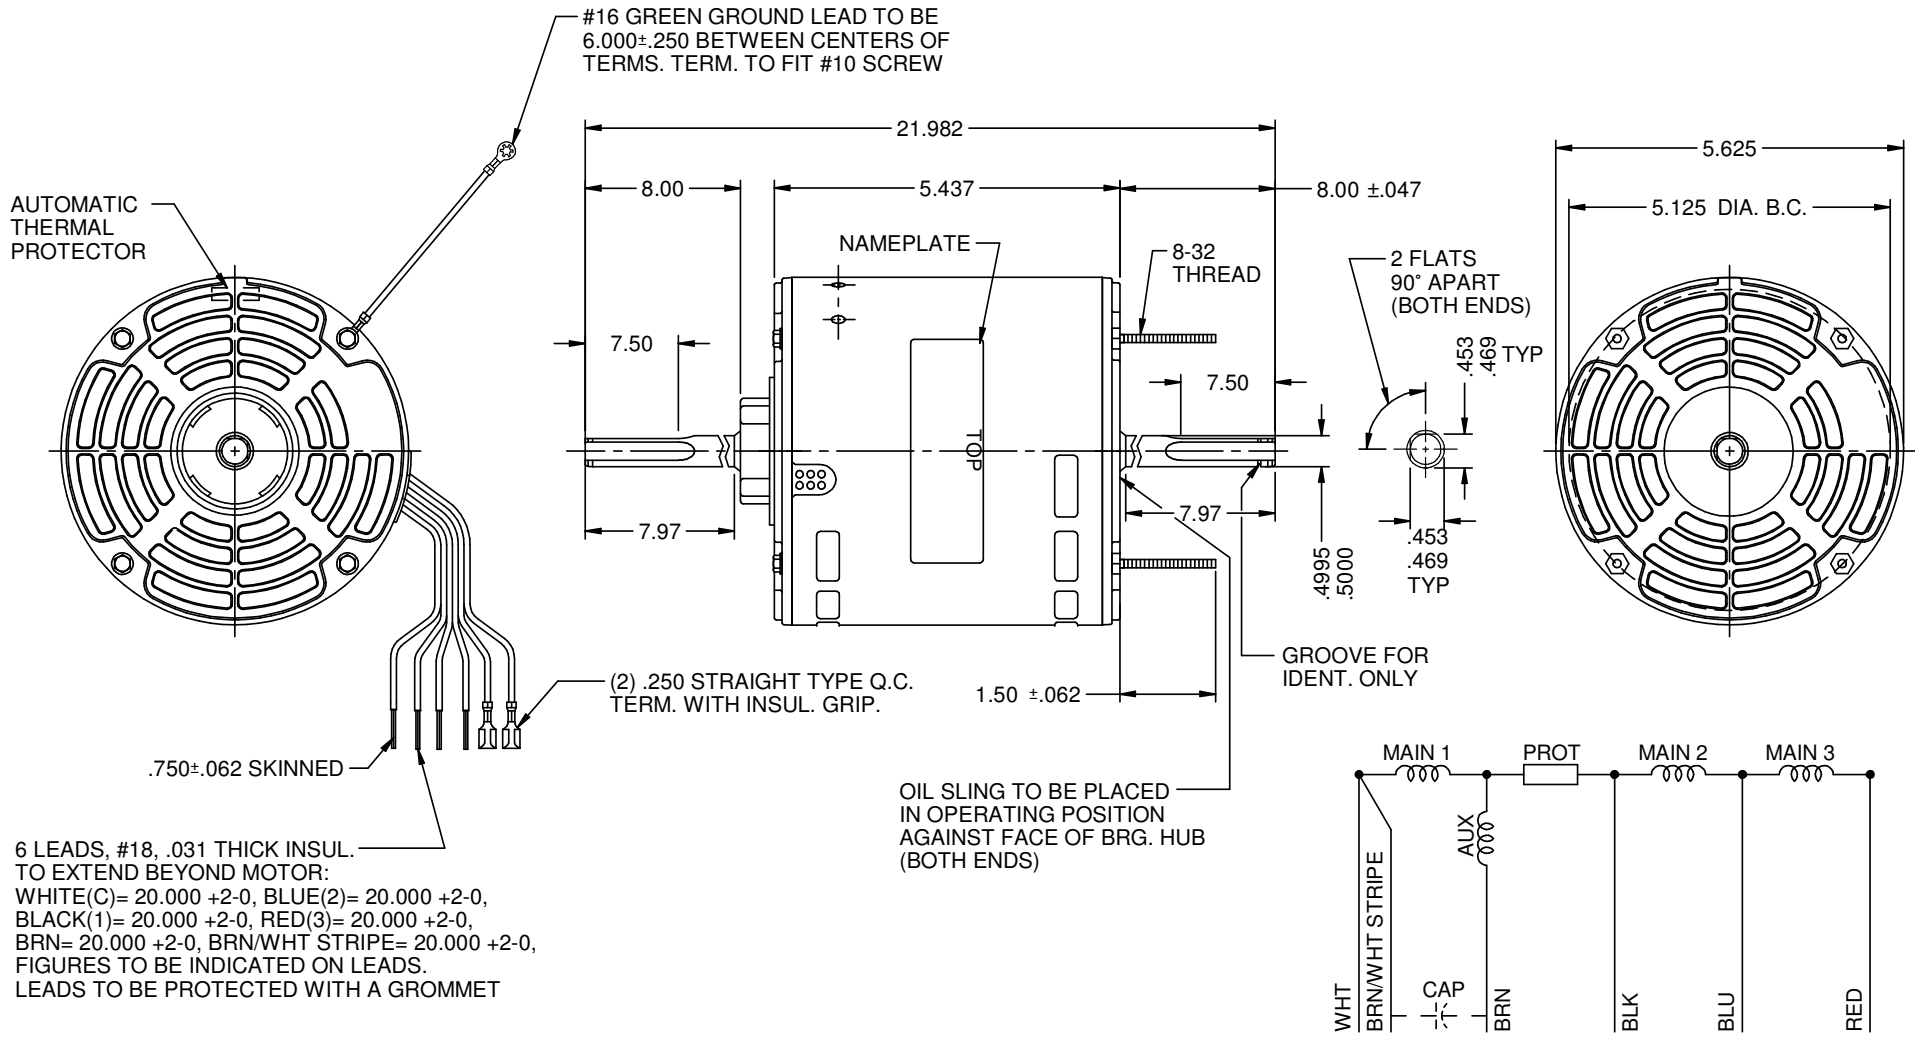

6 LEADS, #18, .031 THICK INSUL. TO EXTEND BEYOND MOTOR:  
 WHITE(C)= 20.000 +2-0, BLUE(2)= 20.000 +2-0,  
 BLACK(1)= 20.000 +2-0, RED(3)= 20.000 +2-0,  
 BRN= 20.000 +2-0, BRN/WHT STRIPE= 20.000 +2-0,  
 FIGURES TO BE INDICATED ON LEADS.  
 LEADS TO BE PROTECTED WITH A GROMMET

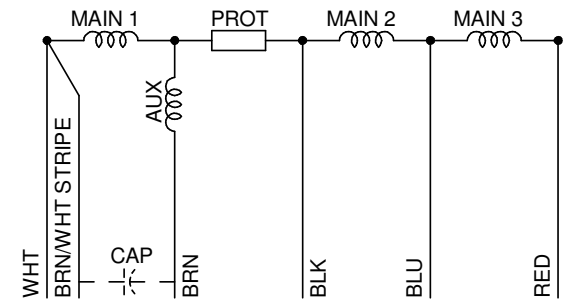

NIDEC MOTOR CORPORATION 26-May-17

REFER TO S.E.I.M. 24-1

REVISION RECORD FOR: E28700		DIMENSIONS ARE FOR REFERENCE ONLY	<b>NIDEC MOTOR CORPORATION</b> INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				REVISION DATE: 23-MAY-17	
CREATED DRAWING:							TITLE: CUSTOMER DETAIL DRAWING	
ISSUED BY: G. MEDINA	ENGINEER APPROVED: H. NAVARRO	UNLESS TOLERANCE IS SPECIFIED						