



MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN	DESCRIPTION / REMARKS
K55HXTNM-9631	-----	STANDARD/HOLESALE-HAC	3/4	208-230	4.6	60	1075/ 5 SPD	CCW LEAD END	8057	K55 HUB MTD BALL BRG OPEN

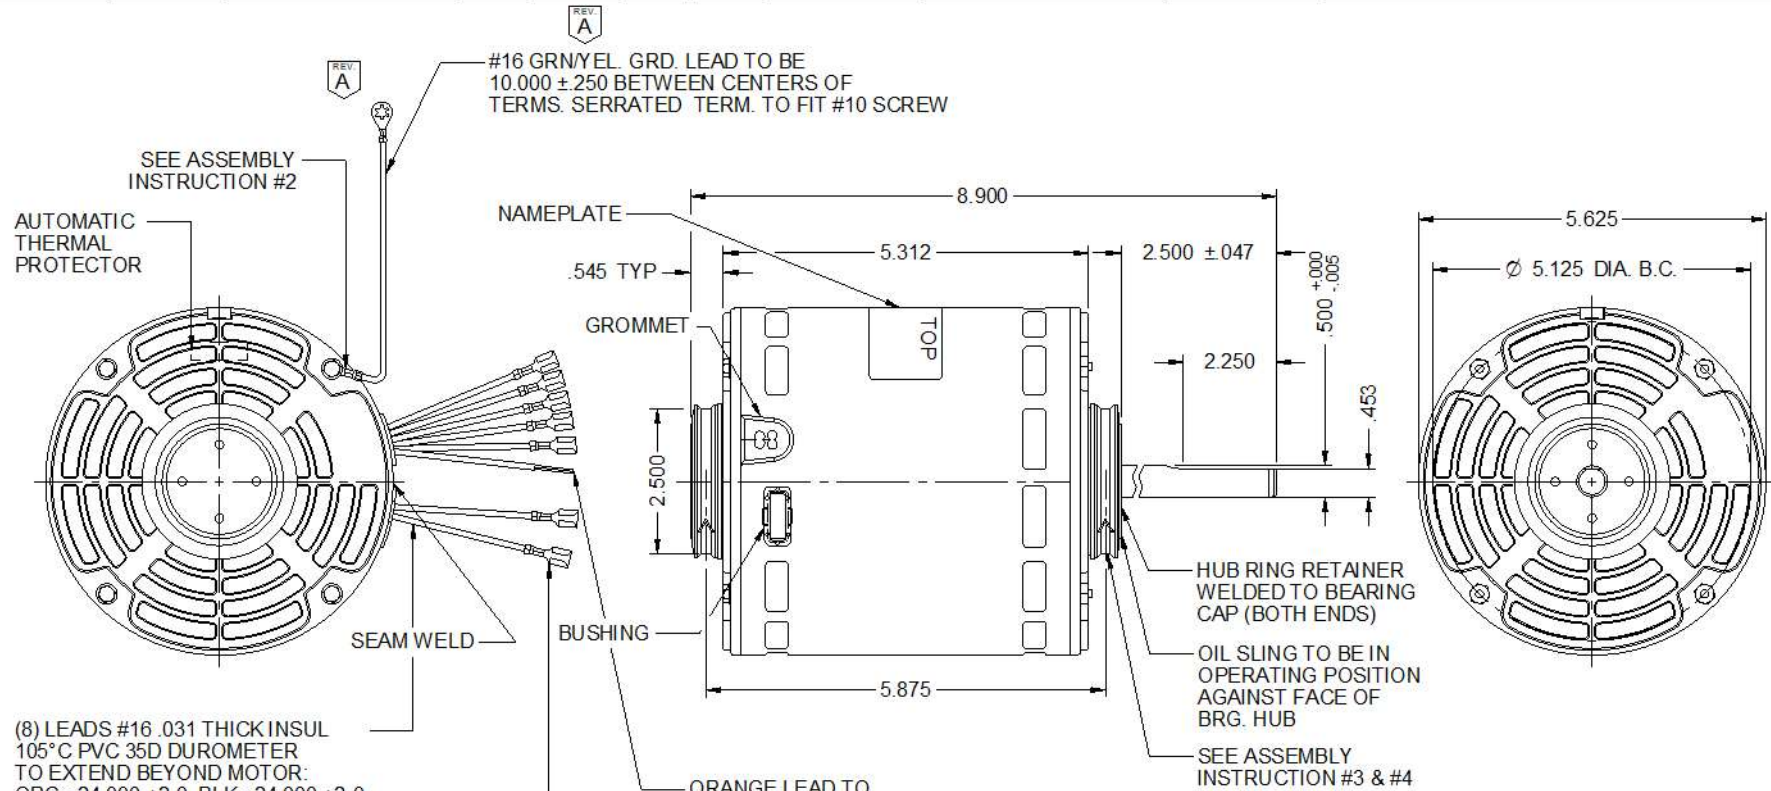

(8) LEADS #16 .031 THICK INSUL
105°C PVC 35D DUROMETER
TO EXTEND BEYOND MOTOR:
ORG= 24.000 +2-0, BLK= 24.000 +2-0
BRN= 24.000 +2-0, BLU= 24.000 +2-0
YEL= 24.000 +2-0, RED= 24.000 +2-0
(2) PUR= 20.000 +2-0

(7) .250 STRAIGHT TYPE Q.C.
TERMS

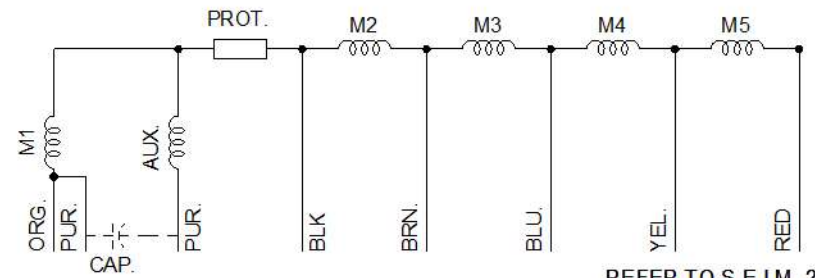

REFER TO S.E.I.M. 24-1

NIDEC MOTOR CORPORATION 06-Aug-21

REVISION RECORD FOR: ECO E40337	
WAS CHANGED DRAWING OF THE EYELET TERMINAL TO SERRATE TERMINAL AND CORRECTED NOTE	
ISSUED BY: C.ALMAGUER	ENGINEER APPROVED: W.GARZA

DIMENSIONS ARE FOR REFERENCE ONLY
UNLESS TOLERANCE IS SPECIFIED

NIDEC MOTOR CORPORATION			
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION			REVISION DATE: 09-AUG-21
TITLE: CUSTOMER DETAIL DRAWING	CODE: V02	ITEM NO.: 836411	REV: A
		SHEET NUMBER: 1 OF 3	DWG SIZE: B